


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.433	138
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.492	12.5
CROWN WHEEL SPIGOT DIA	D2	4.645	118
BEARING DIA	D3	1.782	45.3
BEARING DISTANCE	L1	4.175	106.0
SPIGOT LENGTH	L2	0.800	20.3
	L2/A	0.815	20.7
OVERALL LENGTH	L3	5.790	147.0
BEARING/CROWN WHEEL	L4	0.630	16.0
BORE	D4	1.156	29.4
DRIVE SHAFT SPLINE:-			
No. OF TEETH		26	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

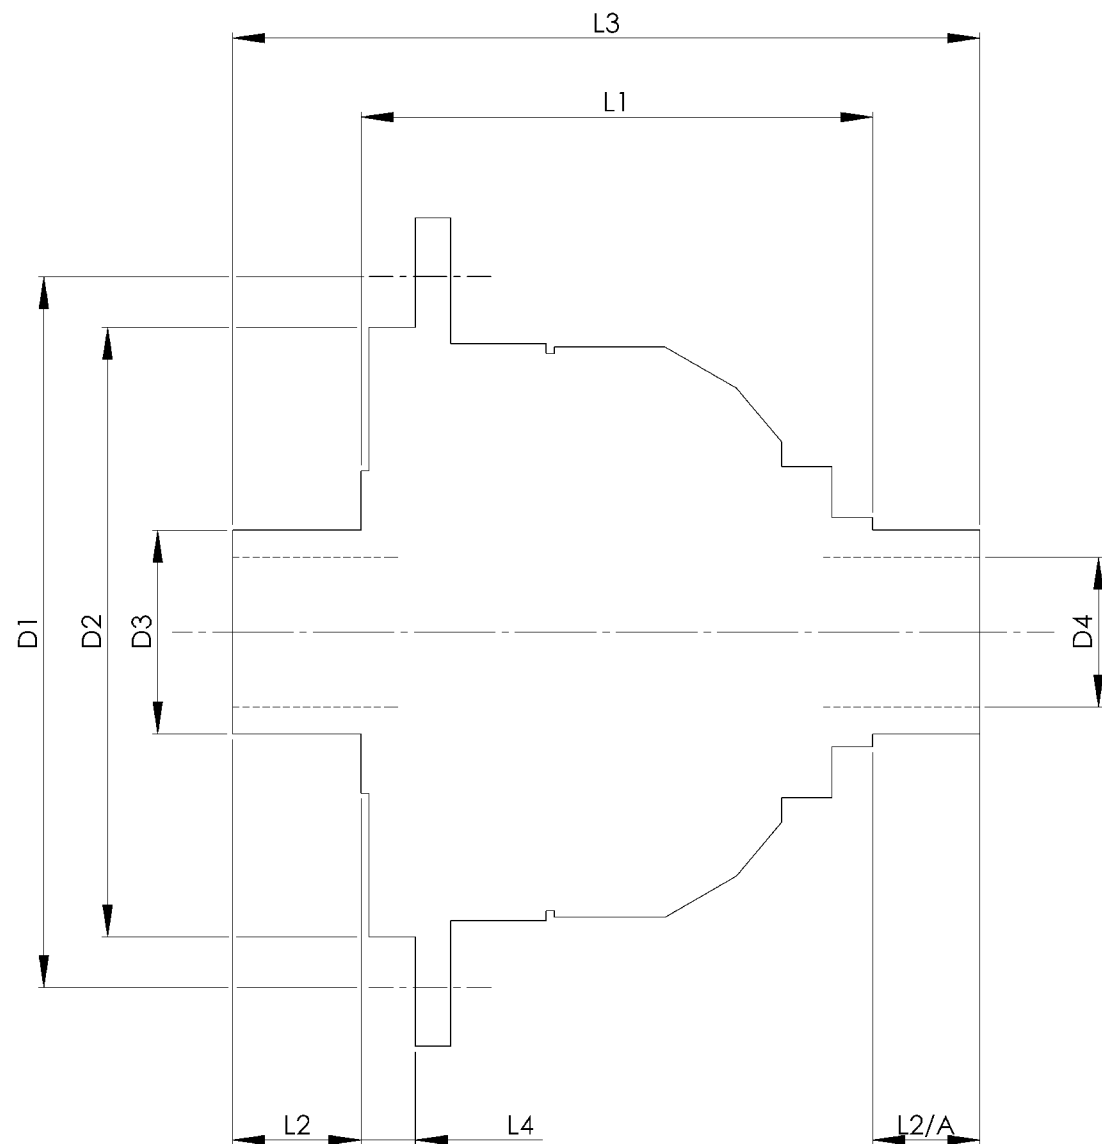

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF25Z

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF M.L.S.M. (INDIA) PRIVATE LIMITED AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. ± 1/64".	
DEC. ± 0.005".	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 18.5.05	
DRAWN BY. M.L.M.	

Used In. FORD TAURUS SHO V6