


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.625	168.3
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.460	11.7
CROWN WHEEL SPIGOT DIA	D2	5.5633	141.3
BEARING DIA	D3	1.7843	45.3
	D3/A	1.7827	45.3
BEARING DISTANCE	L1	6.143	156.0
SPIGOT LENGTH	L2	0.782	19.9
	L2/A	0.790	20.0
OVERALL LENGTH	L3	7.715	196.0
BEARING/CROWN WHEEL	L4	1.128	28.6
BORE	D4	1.320	33.5
DRIVE SHAFT SPLINE:-			
No. OF TEETH		30	
PITCH		24/48 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30 DEG	

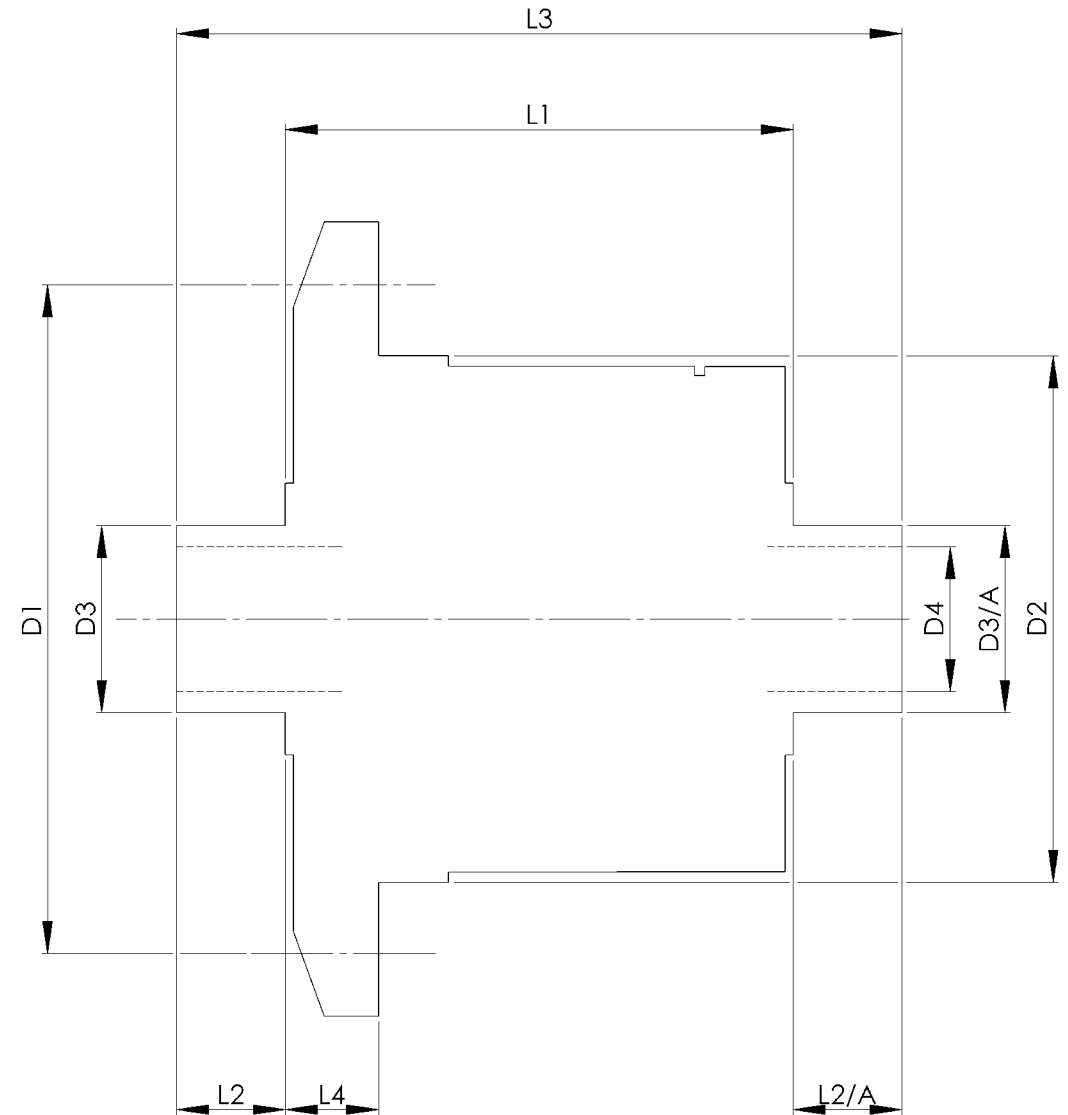

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH4U

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF RUTLAND TECHNOLOGIES. ANY REPRODUCTION OR USE OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF RUTLAND TECHNOLOGIES IS PROHIBITED.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. ± 1/64".	
DEC. ± 0.005".	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 17.5.05	
DRAWN BY. M.L.M.	
Used In. DODGE VIPER SRT-10	