


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.567	116
No. OF BOLTS		8	8
THREAD / THRO' HOLE		M12x1.25	M12x1.25
CROWN WHEEL SPIGOT DIA	D2	3.779	96.0
BEARING DIA	D3	1.3785	35.0
BEARING DISTANCE	L1	4.250	108.0
SPIGOT LENGTH	L2	0.725	18.4
	L2/A	0.725	18.4
OVERALL LENGTH	L3	5.700	144.8
BEARING/CROWN WHEEL	L4	0.740	18.8
BORE	D4	1.046	26.6
DRIVE SHAFT SPLINE:-			
No. OF TEETH		25	
PITCH		1 MOD.	
TYPE			
PRESSURE ANGLE		37.5 DEG	

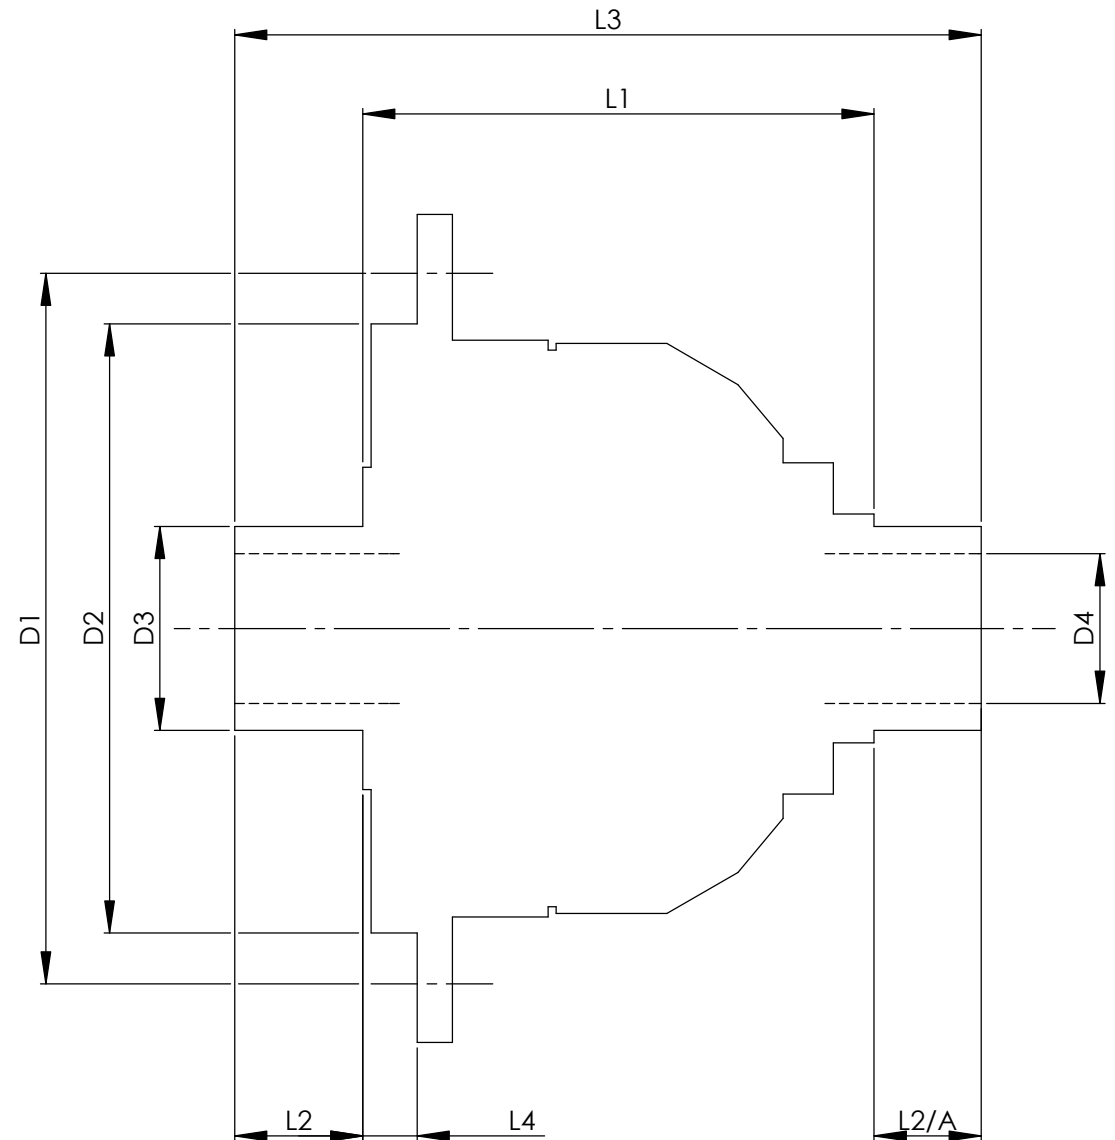

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDH8B

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH, GRIND@G
 LIMITS. FRACT. ± 1/64"
 DEC. ± 0.005"
 MATERIAL.
 TREATMENT.
 ISSUE. 01 DATE. 19.5.05
 DRAWN BY. M.L.M.
Used In. MITSUBISHI ECLIPSE / Talon 4x4 (front)