

Drg No. QDF25E


REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.669	144
No. OF BOLTS		16	16
THREAD / THRO' HOLE		0.492	12.5
CROWN WHEEL SPIGOT DIA	D2	4.8816	124.0
BEARING DIA	D3	1.9708	50.0
	D3/A	2.2454	57.0
BEARING DISTANCE	L1	3.914	99.4
SPIGOT LENGTH	L2	0.912	23.2
	L2/A	1.395	35.4
OVERALL LENGTH	L3	5.890	149.6
BEARING/CROWN WHEEL	L4	0.631	16.0
BORE	D4	1.378	35.0

DRIVE SHAFT SPLINE:-

No. OF TEETH	24
PITCH	20/40 DP
TYPE	FLAT ROOT SIDE FIT
PRESSURE ANGLE	30 DEG

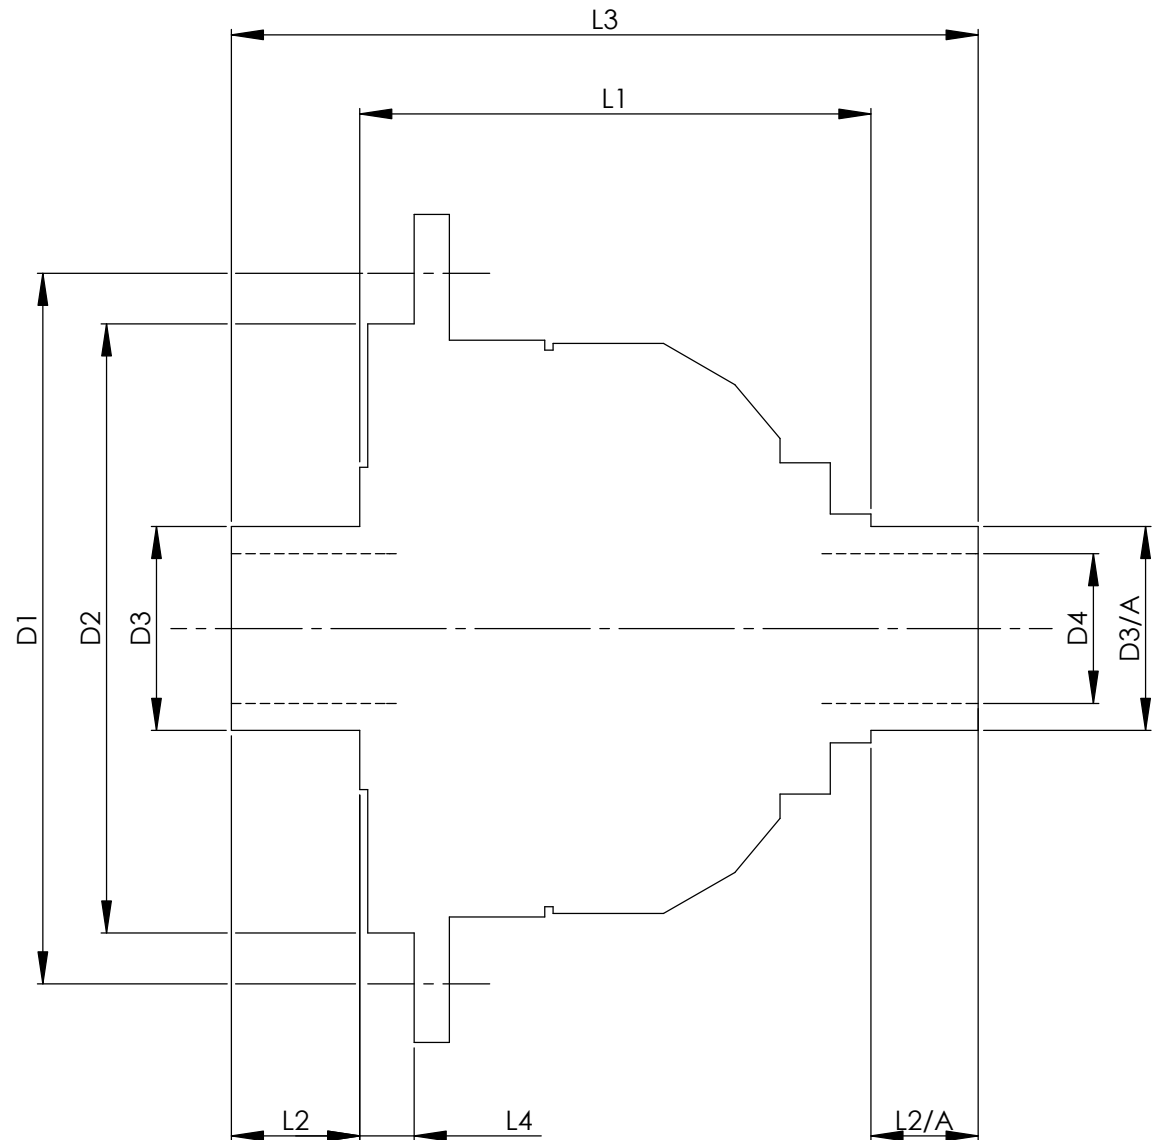

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDF25E

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 26.10.05	
DRAWN BY. J.P.D.	

Used In. TOYOTA E350 (A) 3