


		INCH	MM
BEARING DISTANCE	L1	3.200	81.28
SPIGOT LENGTH	L2	1.845	46.86
	L2/A	5.400	137.16
OVERALL LENGTH	L3	10.445	265.30
BEARING DIA	D3	2.166	55.02
	D3/A	3.438	87.33
BORE	D4	1.275	32.37
	D4/A	1.282	32.55
SHAFT DIA	D5	2.080	52.83
	D5/A	2.118	53.80
DRIVE SHAFT SPLINE:-		EXT. 1	EXT. 2
No. OF TEETH		20	50
PITCH		10/20 DP	24/48 DP
PRESSURE ANGLE		30	45

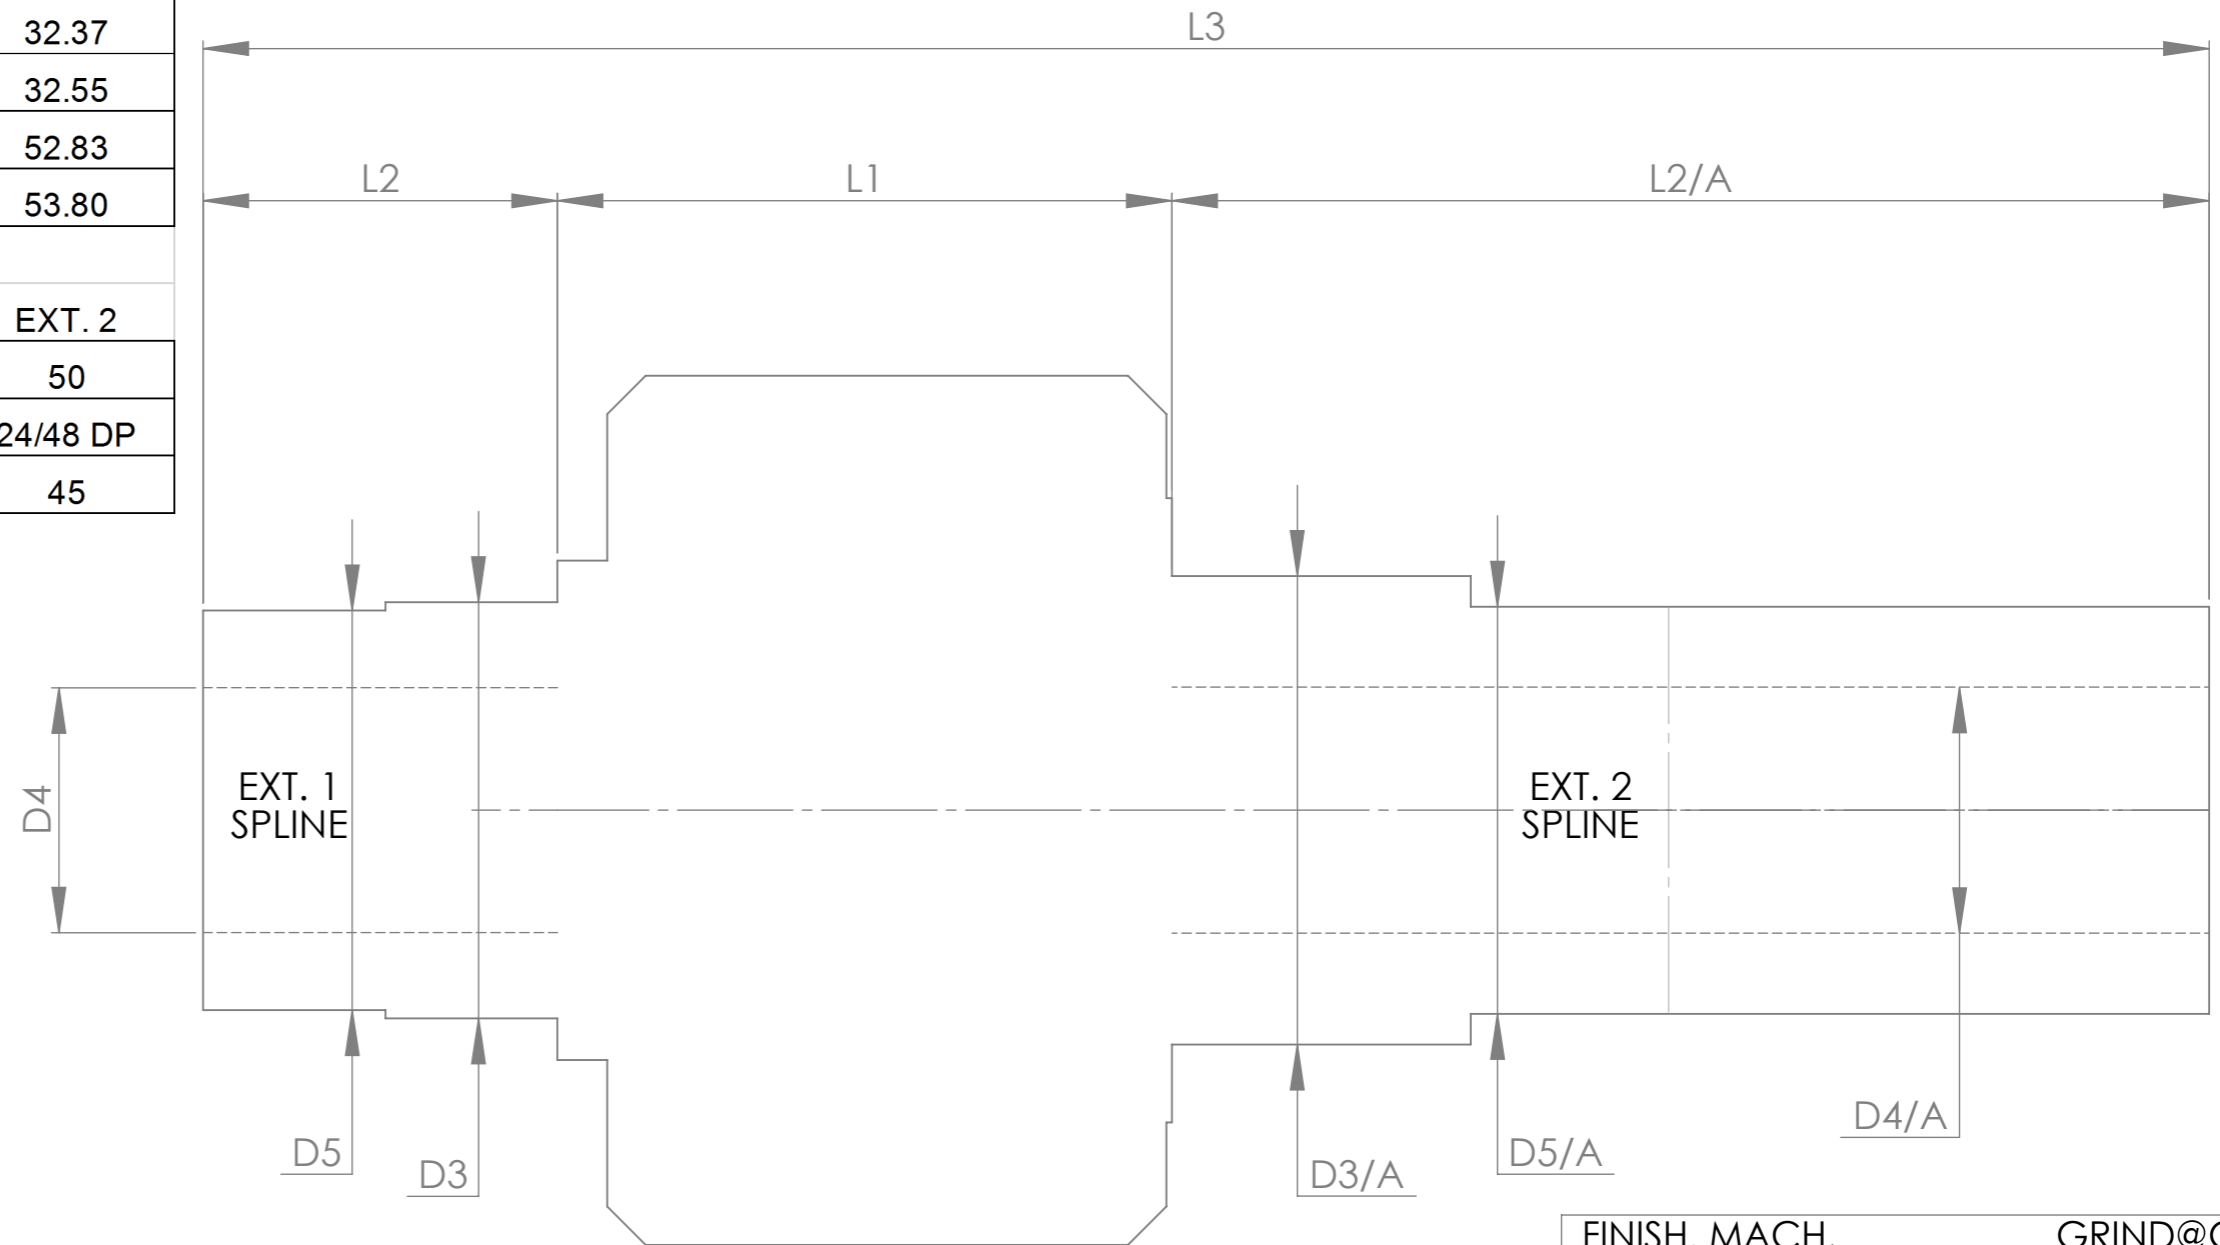

TITLE CENTRE. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDF30KT

A3(4)border

**Quaife Design & Development.**

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF RT QUAIFFE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH, GRIND@G  
LIMITS. FRACT. ± 1/64".  
DEC. ± 0.005".

MATERIAL.  
TREATMENT.

ISSUE. 01 DATE. 15/09/1999

DRAWN BY. M.L.M.

**Used In.** LT230T RANGE ROVER  
MODELS AFTER 1988

SOLID WORKS