


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.250	133.4
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.394	10.0
CROWN WHEEL SPIGOT DIA	D2	4.501	114.3
BEARING DIA	D3	1.628	41.4
BEARING DISTANCE	L1	4.595	116.7
SPIGOT LENGTH	L2	0.775	19.7
	L2/A	0.785	20.0
OVERALL LENGTH	L3	6.155	156.3
BEARING/CROWN WHEEL	L4	0.748	19.0
BORE	D4	1.046	26.6
DRIVE SHAFT SPLINE:-			
No. OF TEETH		23	
PITCH		24/48 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30 DEG	

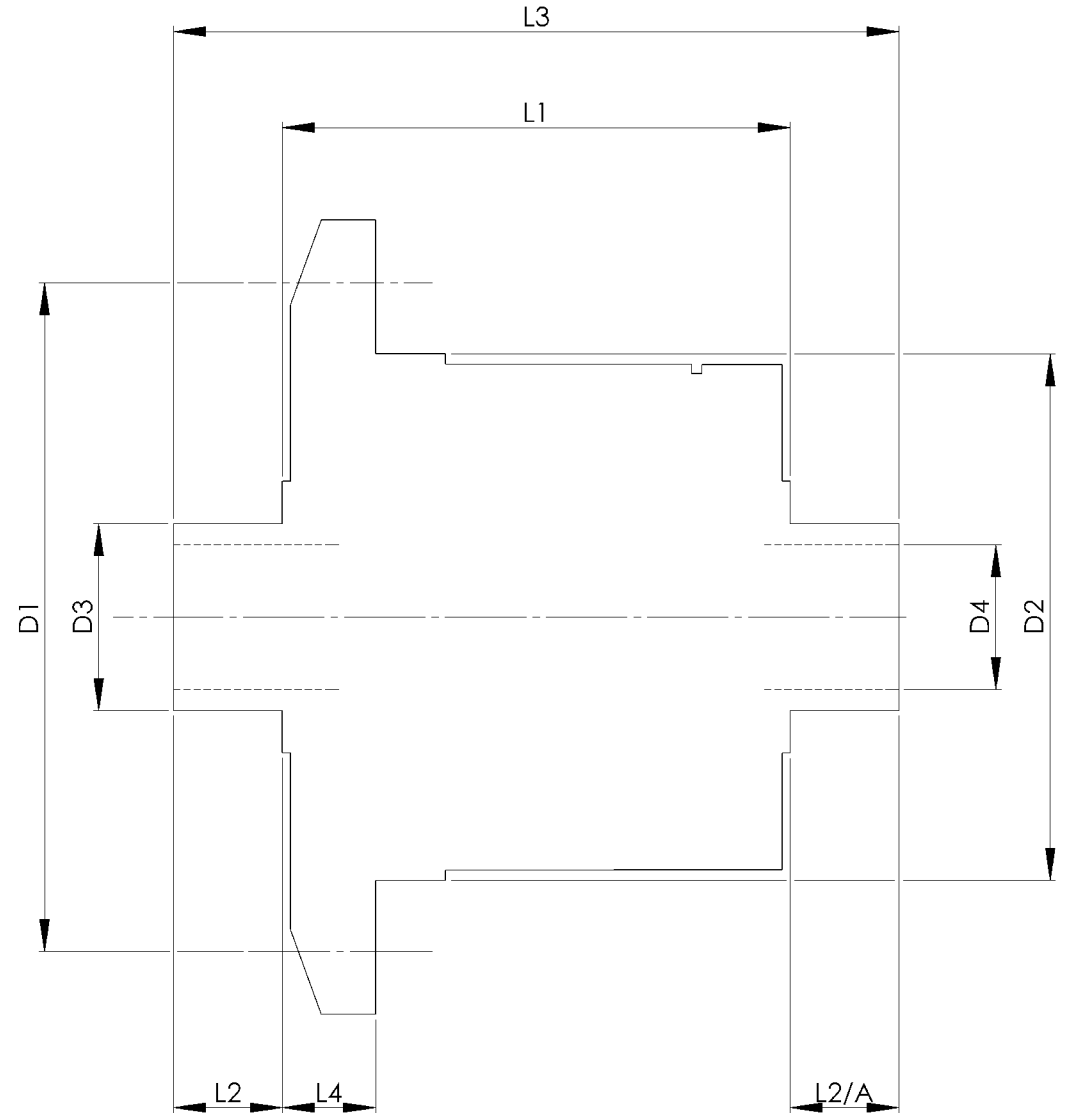

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
<b>Drg. No.</b> QDF31K

**Quaife Design & Development.**

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE SOLE PROPERTY OF RUTLAND ENGINEERING LTD. AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 18.5.05	
DRAWN BY. M.L.M.	
<b>Used In.</b> LAND ROVER FREELANDER (Rear - Large Brgs.)	