


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.413	137.5
No. OF BOLTS		12	12
THREAD / THRO' HOLE		0.43	10.9
CROWN WHEEL SPIGOT DIA	D2	4.5875	116.5
BEARING DIA	D3	1.5002	38.1
BEARING DISTANCE	L1	4.645	117.9
SPIGOT LENGTH	L2	0.700	17.8
	L2/A	0.727	18.5
OVERALL LENGTH	L3	6.072	154.2
BEARING/CROWN WHEEL	L4	0.866	22.0
BORE	D4	1.105	28.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		25	
PITCH		24/48 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30 DEG	

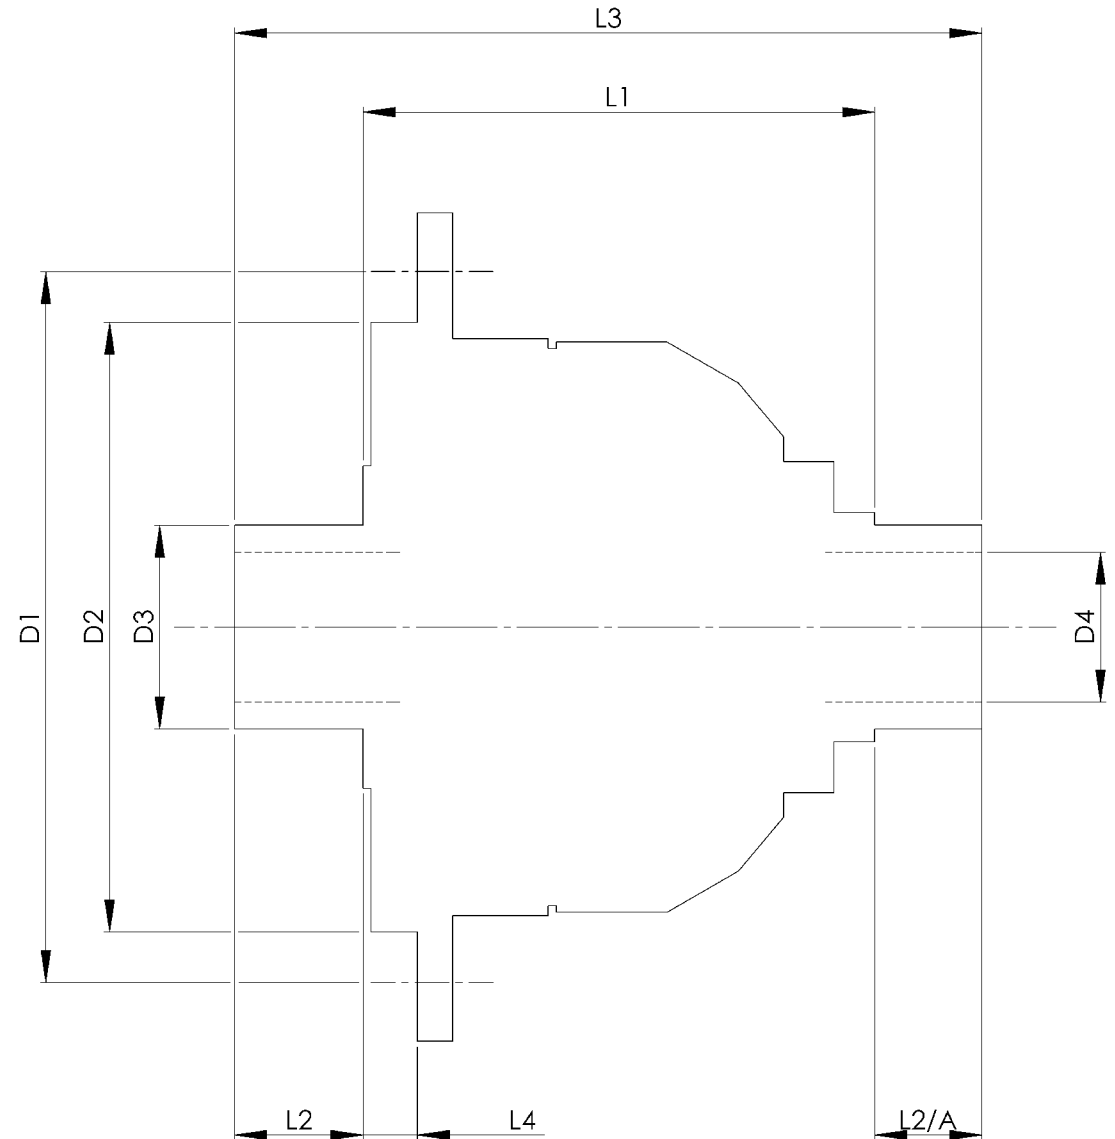

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDF3I

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF CHRYSLER GROUP LLC. IT IS TO BE KEPT IN STRICTLY CONFIDENTIAL AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH, GRIND@G
 LIMITS. FRACT. ± 1/64".
 DEC. ± 0.005".
 MATERIAL.
 TREATMENT.
 ISSUE. 01 DATE. 17.5.05
 DRAWN BY. M.L.M.

Used In. CHRYSLER SEBRING, CIRRUS
 DODGE NEON AUTO, AVENGER, STRATUS