


8f [Bc" E 8: (<

F9A C J 9'5@@6l FFG'5B8 'G<5FD'98; 9G'

H<#8 '5B; @'DFC >97 H€ B"

		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.803	122
No. OF BOLTS		12	12
THREAD / THRO' HOLE		M10x1.25	M10x1.25
CROWN WHEEL SPIGOT DIA	D2	4.0154	102.0
BEARING DIA	D3	1.8116	46.0
BEARING DISTANCE	L1	4.335	110.1
SPIGOT LENGTH	L2	0.880	22.4
	L2/A	0.700	17.8
OVERALL LENGTH	L3	5.915	150.2
BEARING/CROWN WHEEL	L4	1.015	25.8
BORE	D4	1.3786	35.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		25	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

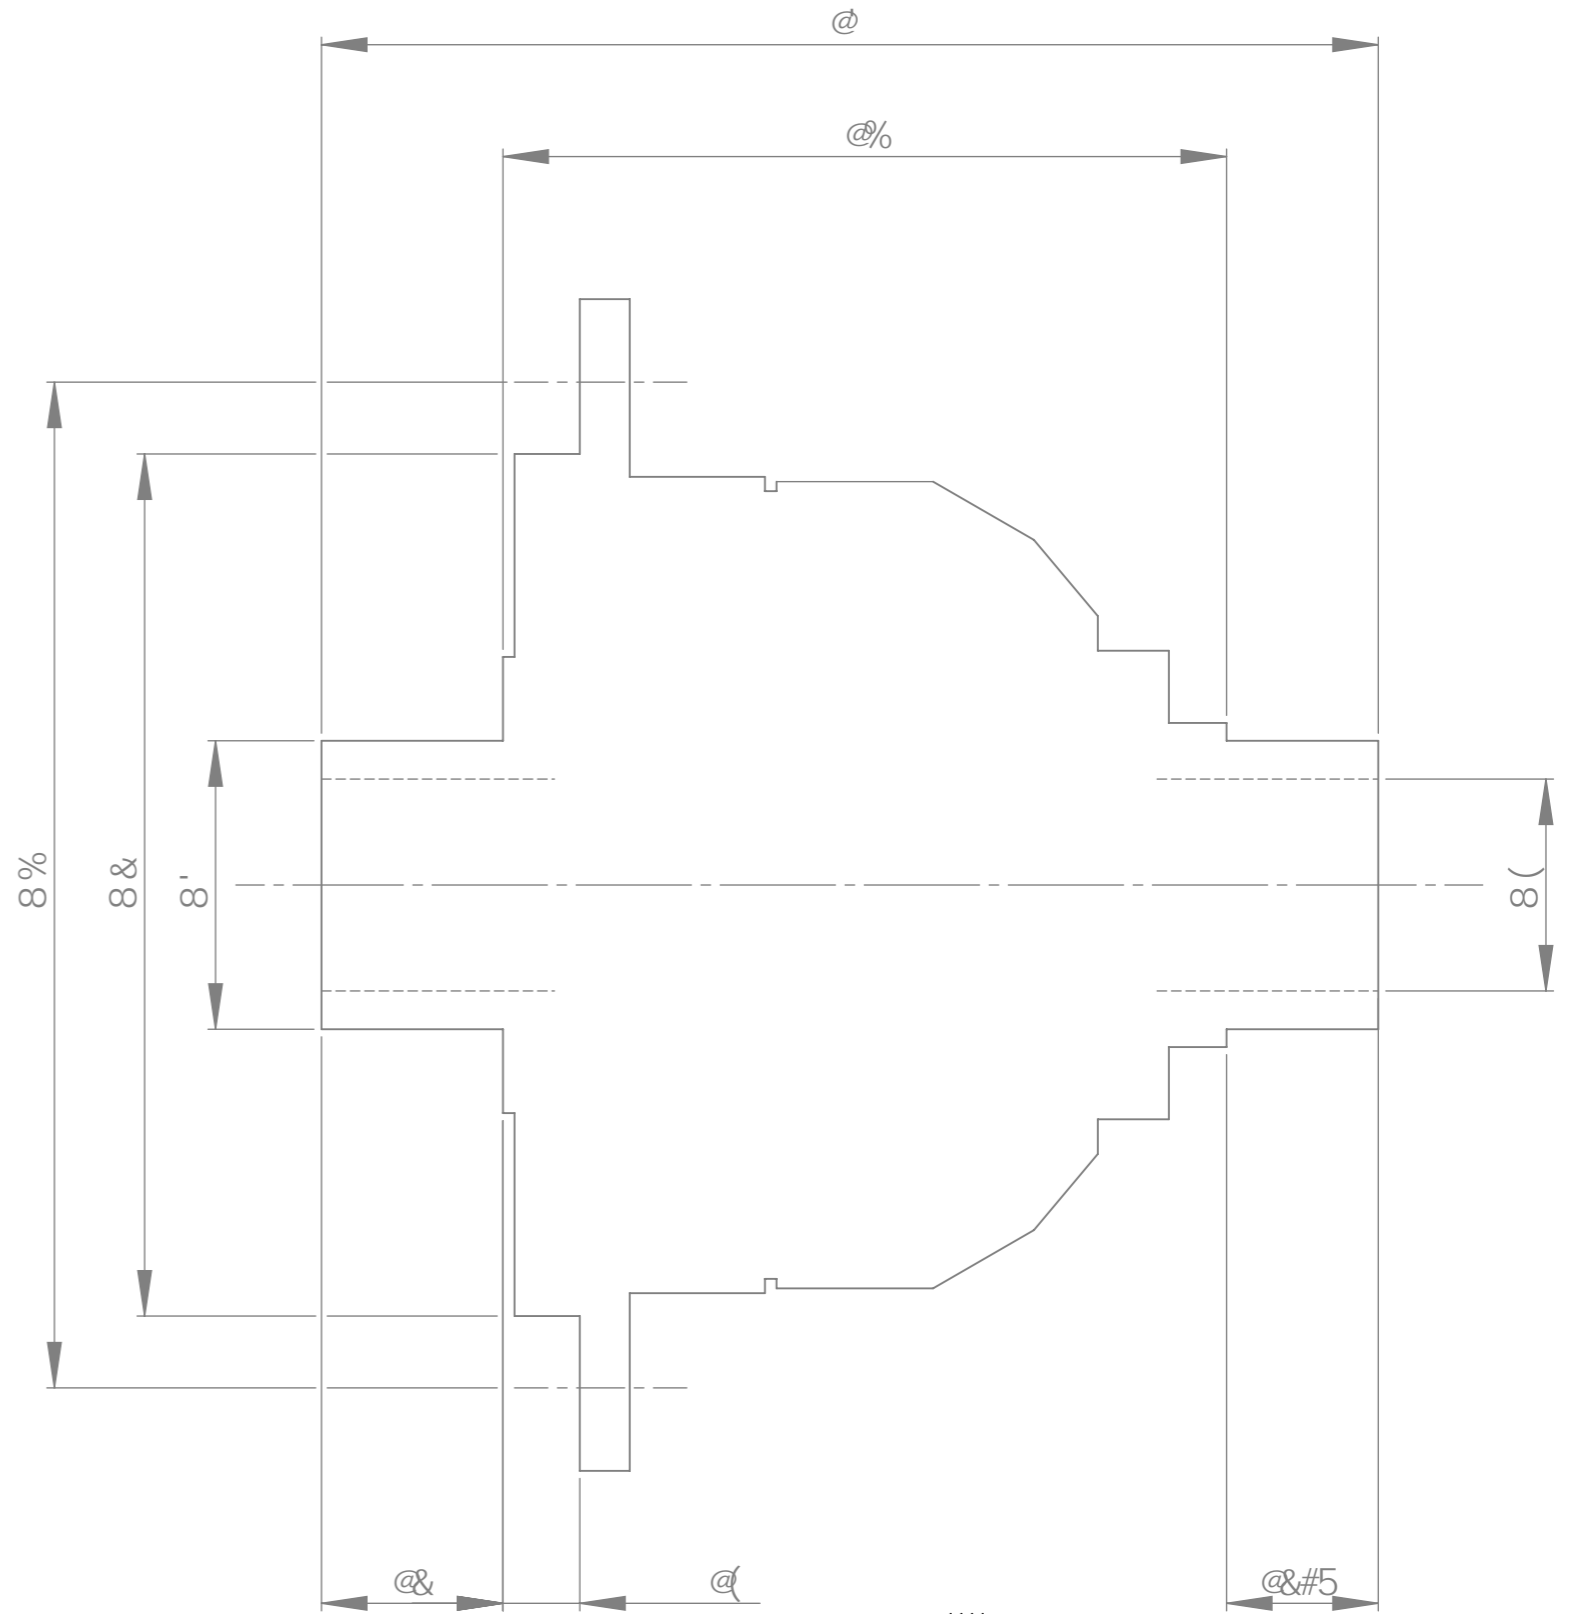

H# @ : "K "8" "8 ÷ : '85 H5 'G<99H'
 G7 5 @ '%%l "C "G" G<99H% C : '%
Fti 0Pq0 E 8: (<

S wcltg'F guli p' ('F gxgnr o gpw0

÷ 'B '8C I 6H5G?"

H-6BF5K-B: CF 89G: B 4GF-7HM
 7CB: 898H5W H-97C DM: <HK-9F9B
 H-9R-78 GJ 93F CDFHAC:
 F7E I 5-99B: 89F-B: 982
 588 A 5MBC H69I 098 7C D98 CF 9L-6H98
 K H-C I Hk-9F K F H88 D9A 4DC B'

: B €<"A 57 <ž "" ; F B84 ;
 @A #G": F57 H' ± '%#* (""
 897 "" + '\$"\$\$) ""
 A 5 H9F 5@ "" ""
 HF 95HA 9BH "" ""
 €GI 9" \$% 85 H9' &' ") "\$) ""
 8F5K B '6MA "@A "
Wugf 'Kp0 HJ'Vch9l dFY gg#7 JfcYb'7 &) #
 / : Jh8i WUhc 'J Ubg