


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.092	104
No. OF BOLTS		10	10
THREAD / THRO' HOLE		M12x1.25	M12x1.25
CROWN WHEEL SPIGOT DIA	D2	4.8820	124.0
BEARING DIA	D3	1.7722	45.3
BEARING DISTANCE	L1	3.283	83.4
SPIGOT LENGTH	L2	0	0
	L2/A	0.732	18.6
OVERALL LENGTH	L3	4.015	102.0
BEARING/CROWN WHEEL	L4	0	0
BORE	D4	1.2604	32.0
	D5	1.282	32.6
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

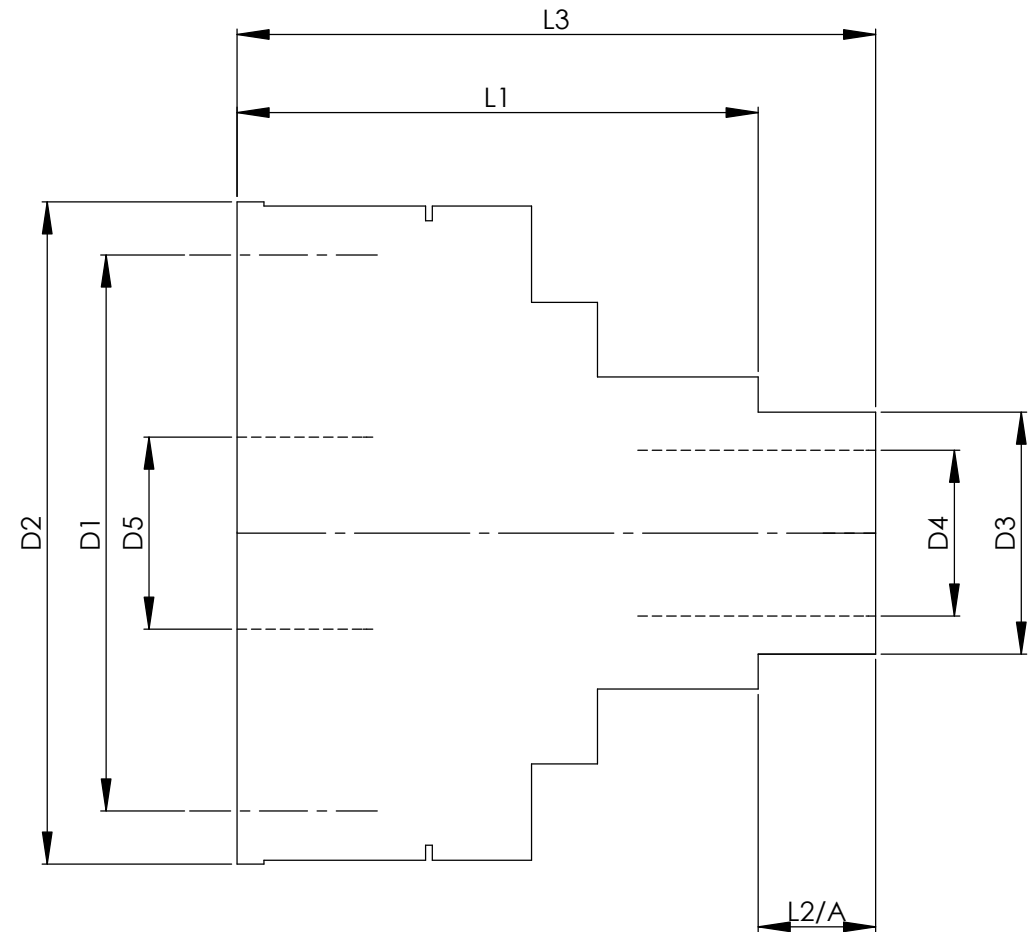

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

**Drg. No.** QDF5M

**Quaife Design & Development.**

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH, GRIND@G  
 LIMITS. FRACT. ± 1/64".  
 DEC. ± 0.005".  
 MATERIAL.  
 TREATMENT.  
 ISSUE. 01 DATE. 20.5.05  
 DRAWN BY. M.L.M.

**Used In.** RENAULT 30/Alpine (UN1 G/B)