


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.433	138
No. OF BOLTS		10	10
THREAD / THRO' HOLE		M10x1 LH	M10x1 LH
CROWN WHEEL SPIGOT DIA	D2	4.6063	117.0
BEARING DIA	D3	1.575	40.0
BEARING DISTANCE	L1	3.460	87.9
SPIGOT LENGTH	L2	0.950	24.1
	L2/A	0.965	24.5
OVERALL LENGTH	L3	5.375	136.5
BEARING/CROWN WHEEL	L4	0.689	17.5
BORE	D4	1.1031	28.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		1 MOD.	
TYPE			
PRESSURE ANGLE		37.5 DEG	

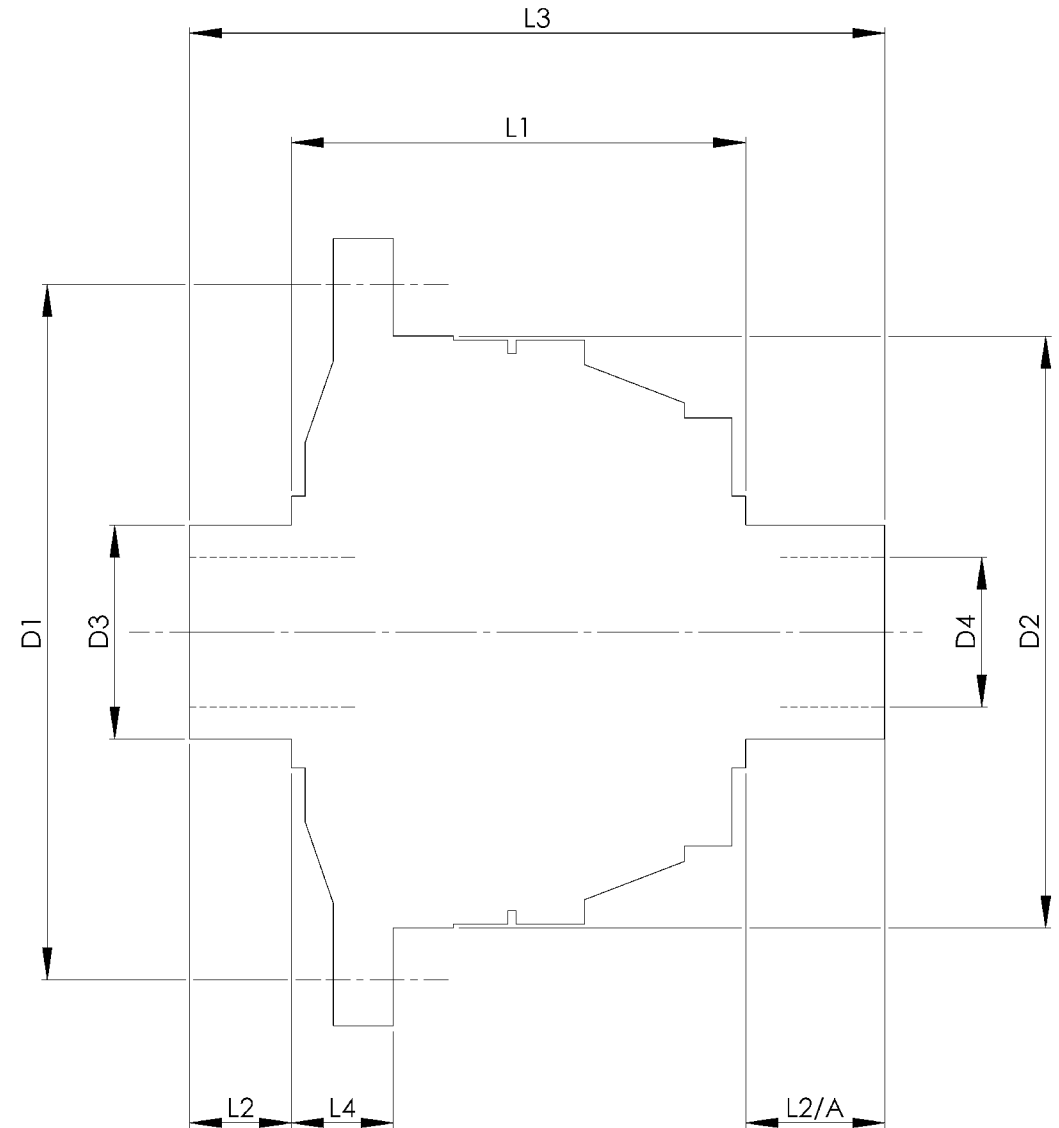

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

**Drg. No. QDF5U**

**Quaife Design & Development.**

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE SOLE PROPERTY OF QUAIFF DESIGN & DEVELOPMENT LTD. AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH. GRIND@G  
 LIMITS. FRACT. ± 1/64".  
 DEC. ± 0.005".  
 MATERIAL.  
 TREATMENT.  
 ISSUE. 01 DATE. 18.5.05  
 DRAWN BY. M.L.M.

**Used In.** HONDA ACCORD 1990-97, Prelude 1992-96, Prelude 1997-00 (except SH)