


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.922	125
No. OF BOLTS		6	6
THREAD / THRO' HOLE		0.375	9.5
CROWN WHEEL SPIGOT DIA	D2	3.839	97.5
BEARING DIA	D3	1.376	34.9
BEARING DISTANCE	L1	3.742	95.0
SPIGOT LENGTH	L2	0.800	20.3
	L2/A	0.800	20.3
OVERALL LENGTH	L3	5.340	135.6
BEARING/CROWN WHEEL	L4	0.687	17.4
BORE	D4	1.022	25.9
DRIVE SHAFT SPLINE:-			
No. OF TEETH		22 or 16	
PITCH		24/48 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

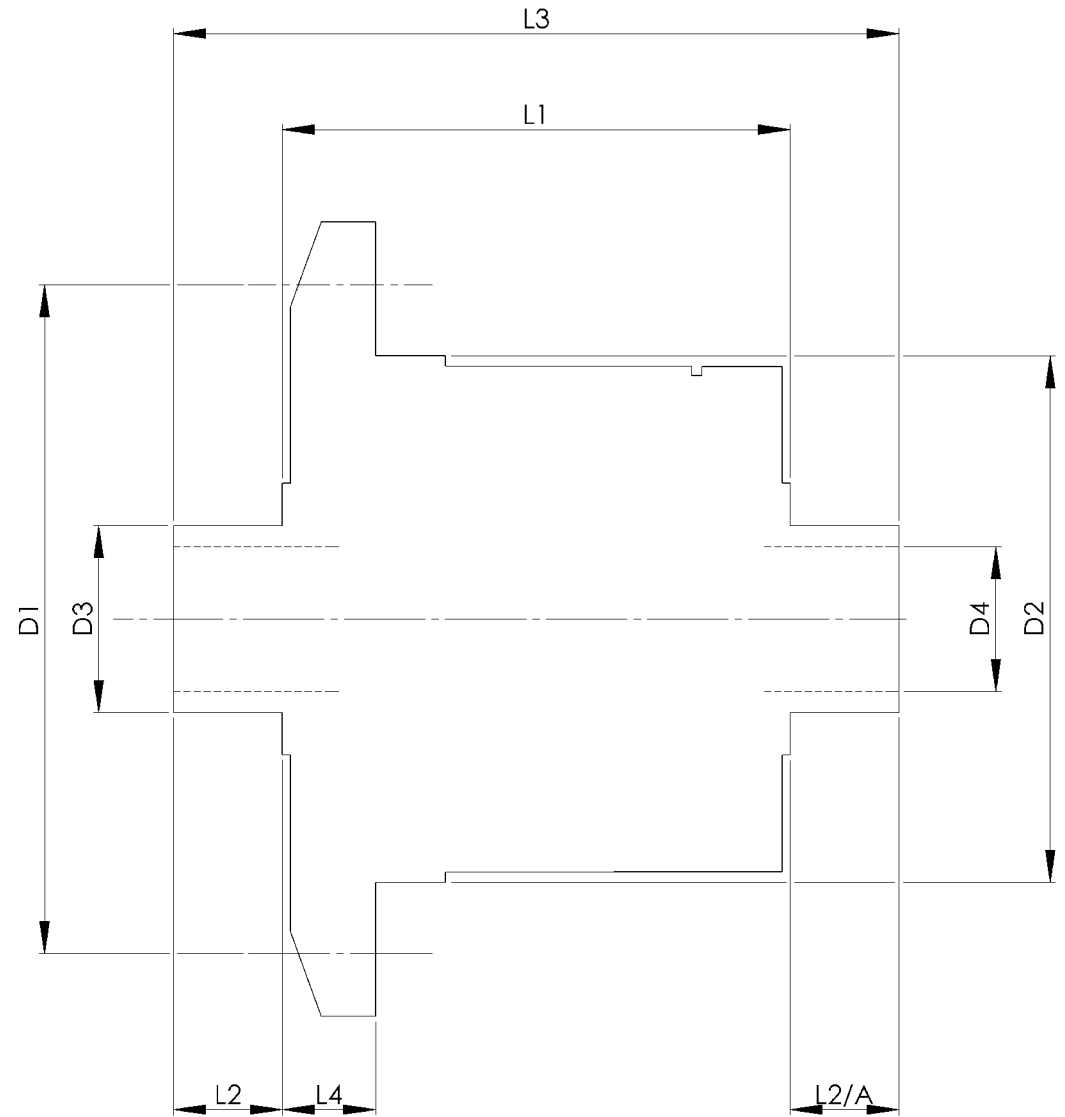

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF5Z

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF RUTLAND TECHNOLOGIES. IT IS TO BE KEPT IN STRICTLY CONFIDENTIAL AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 16.5.05	
DRAWN BY. M.L.M.	

Used In. ENGLISH DIFF