


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.039	128.0
No. OF BOLTS		12	12
THREAD / THRO' HOLE		M10x1.5	M10x1.5
CROWN WHEEL SPIGOT DIA	D2	4.253	108.0
BEARING DIA	D3	1.772	45.0
	D3/A	1.576	40.0
BEARING DISTANCE	L1	4.054	103.0
SPIGOT LENGTH	L2	0.837	21.3
	L2/A	0.808	20.5
OVERALL LENGTH	L3	5.699	144.8
BEARING/CROWN WHEEL	L4	0.332	8.4
BORE	D4	1.123	28.5
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		1 MOD	
TYPE		FILLET ROOT SIDE FIT	
PRESSURE ANGLE		45°	

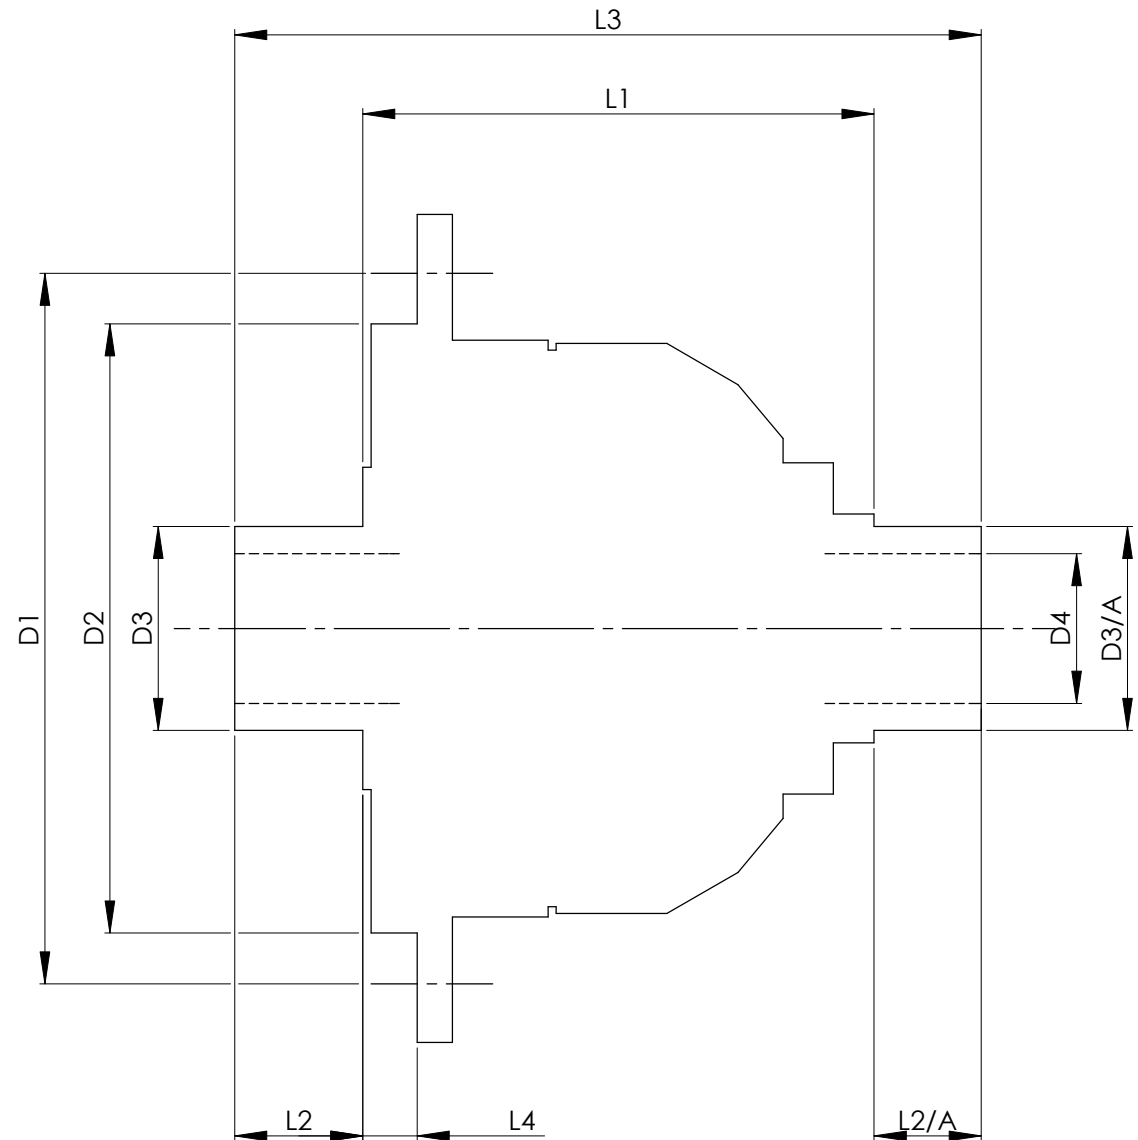

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDH16B

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH, GRIND@G
 LIMITS. FRACT. ± 1/64".
 DEC. ± 0.005".
 MATERIAL.
 TREATMENT.
 ISSUE. 01 DATE. 17.7.07
 DRAWN BY. J.P.D.
Used In. MITSUBISHI 3000GT 4WD FRONT DIFF.