


8f['Bc" E 8<(A

F9A C J 9'5@@6I FFG5B8 'G<5FD'98; 9G'

H<#8 '5B; @9'DFC >97 H€ B"

		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.192	131.9
No. OF BOLTS		8	8
THREAD / THRO' HOLE		0.447	11.4
CROWN WHEEL SPIGOT DIA	D2	4.502	114.3
BEARING DIA	D3	1.785	45.3
BEARING DISTANCE	L1	5.398	137.1
SPIGOT LENGTH	L2	0.835	21.2
	L2/A	0.820	20.8
OVERALL LENGTH	L3	7.053	179.1
BEARING/CROWN WHEEL	L4	1.400	35.6
BORE	D4	1.296	32.9
DRIVE SHAFT SPLINE:-			
No. OF TEETH		28	
PITCH		24/48 D.P.	
TYPE		FILLET ROOT SIDE FIT	
PRESSURE ANGLE		45°	

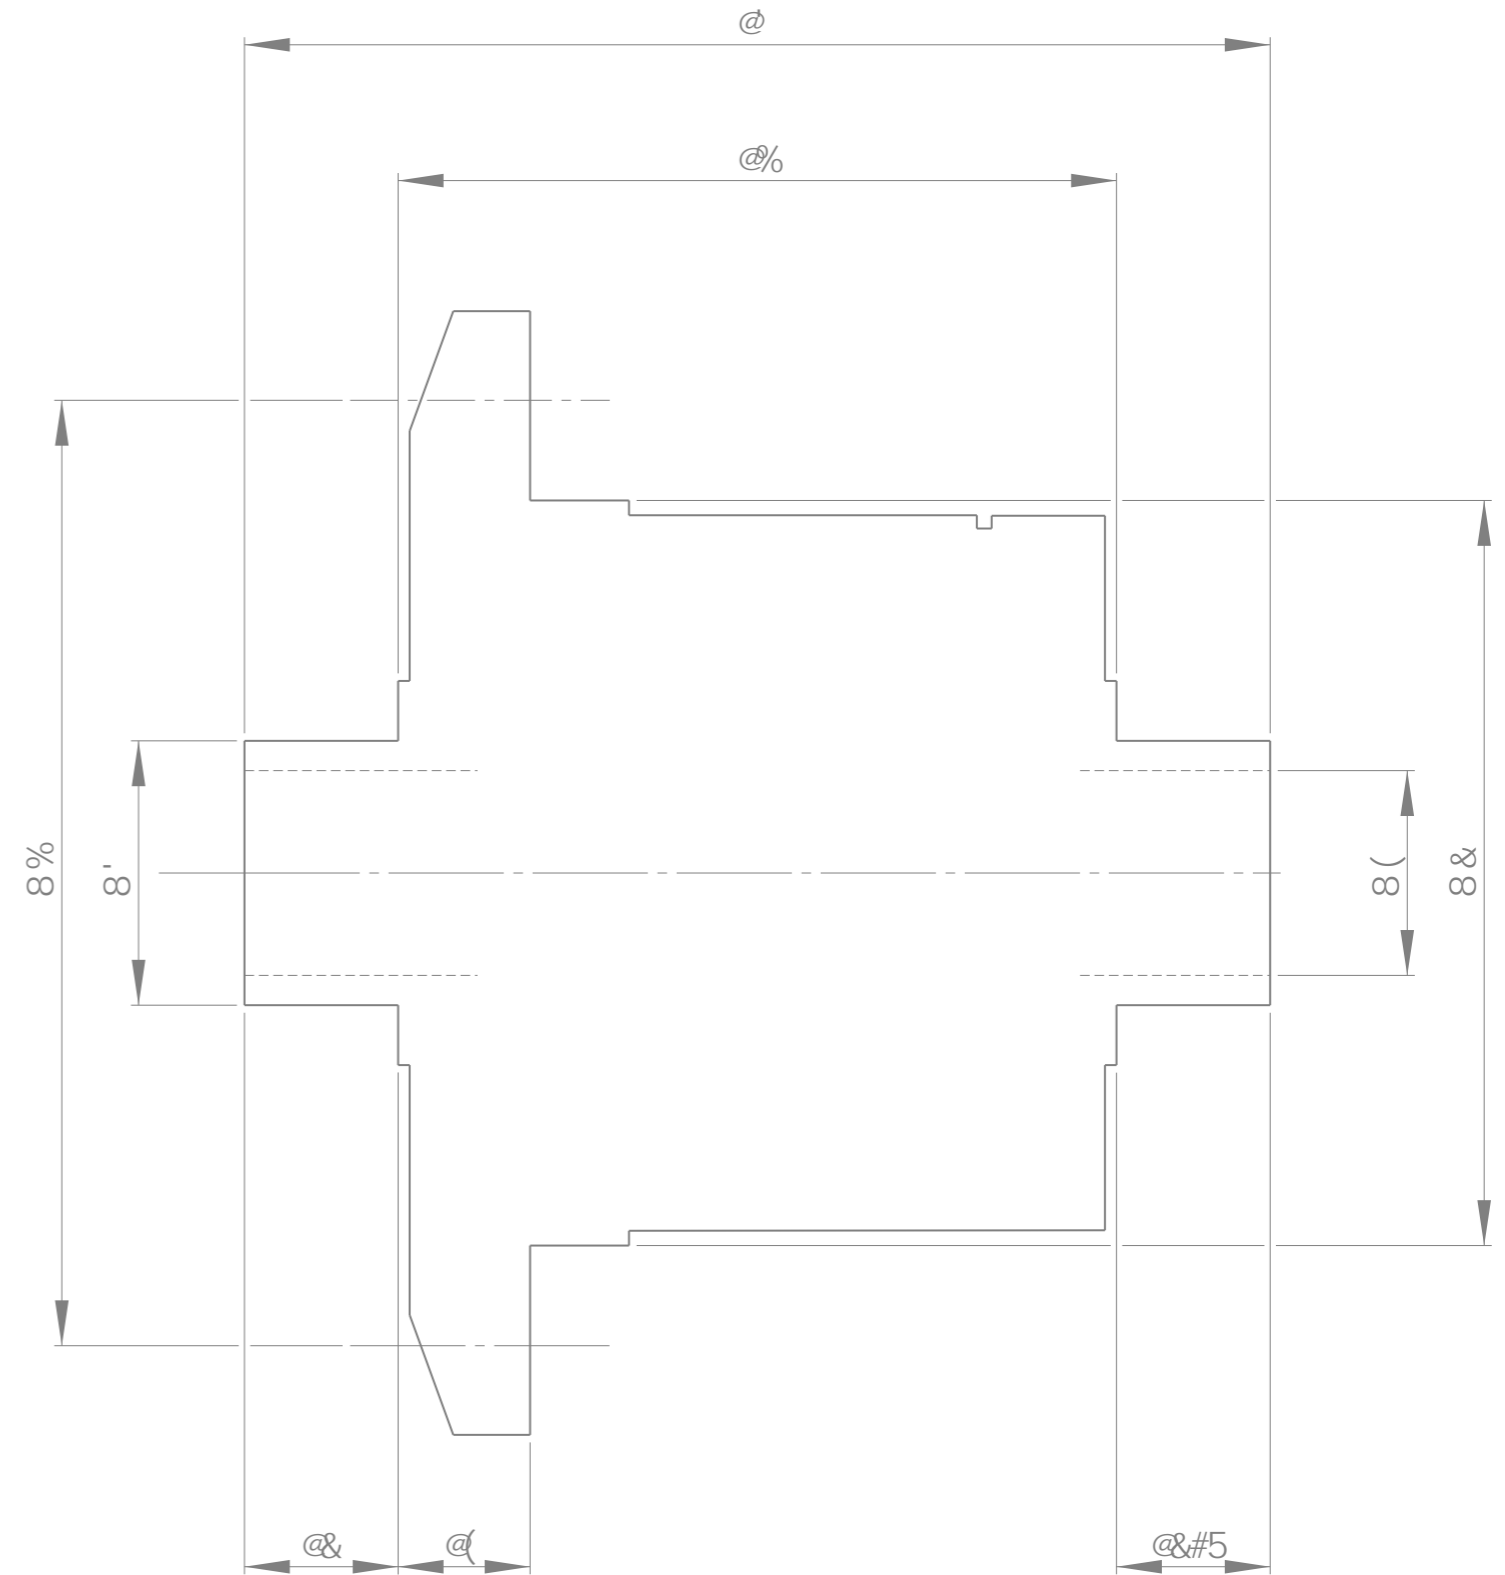

H#9 F"K "8"8÷: '85H5 'G<99H'
 G7 5@'%%'I "C "G" G<99H% C : '%
Fti 0Pq0 E 8<(A

S wclkg'F guli p'(' 'F gxgnro gpw0

÷ 'B '8C I 6H5G?"

H<6BF5K B: CF 89G: B 6GF-7HM
 7CB: 89B56/ H-97C DM: <HK-9'9B
 H-9'9.7 8 G4 93F CDFHAC:
 F7HE 15+99B: 899' B: 982
 588 A 5MBC H69 I 098 7C D98 CF 9<- 6H98
 K H<C I H<9' K F H86 D9A 4GCB"

: B G<"A 57 <ž "" ; F B84 ;
 @A #G": F57 H'± '%#* (" "
 897 "' + "\$\$\$) ""
 A 5 H9F 5@ "" ""
 HF 95HA 9BH "" ""
 €GI 9" \$% 85H9' " , "\$+ "" ""
 8F5K B '6M >"D"8"
Wugf 'Kp0 A'CF; 5B'85B5
 <MBF5H5? '8÷: "