


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.299	160
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.453	11.5
CROWN WHEEL SPIGOT DIA	D2	4.961	126.0
BEARING DIA	D3	1.969	50.0
BEARING DISTANCE	L1	4.646	118.0
SPIGOT LENGTH	L2	0.904	23.0
	L2/A	0.904	23.0
OVERALL LENGTH	L3	6.454	163.9
BEARING/CROWN WHEEL	L4	1.063	27.0
BORE	D4	1.378	35.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		30	
PITCH		24/48DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

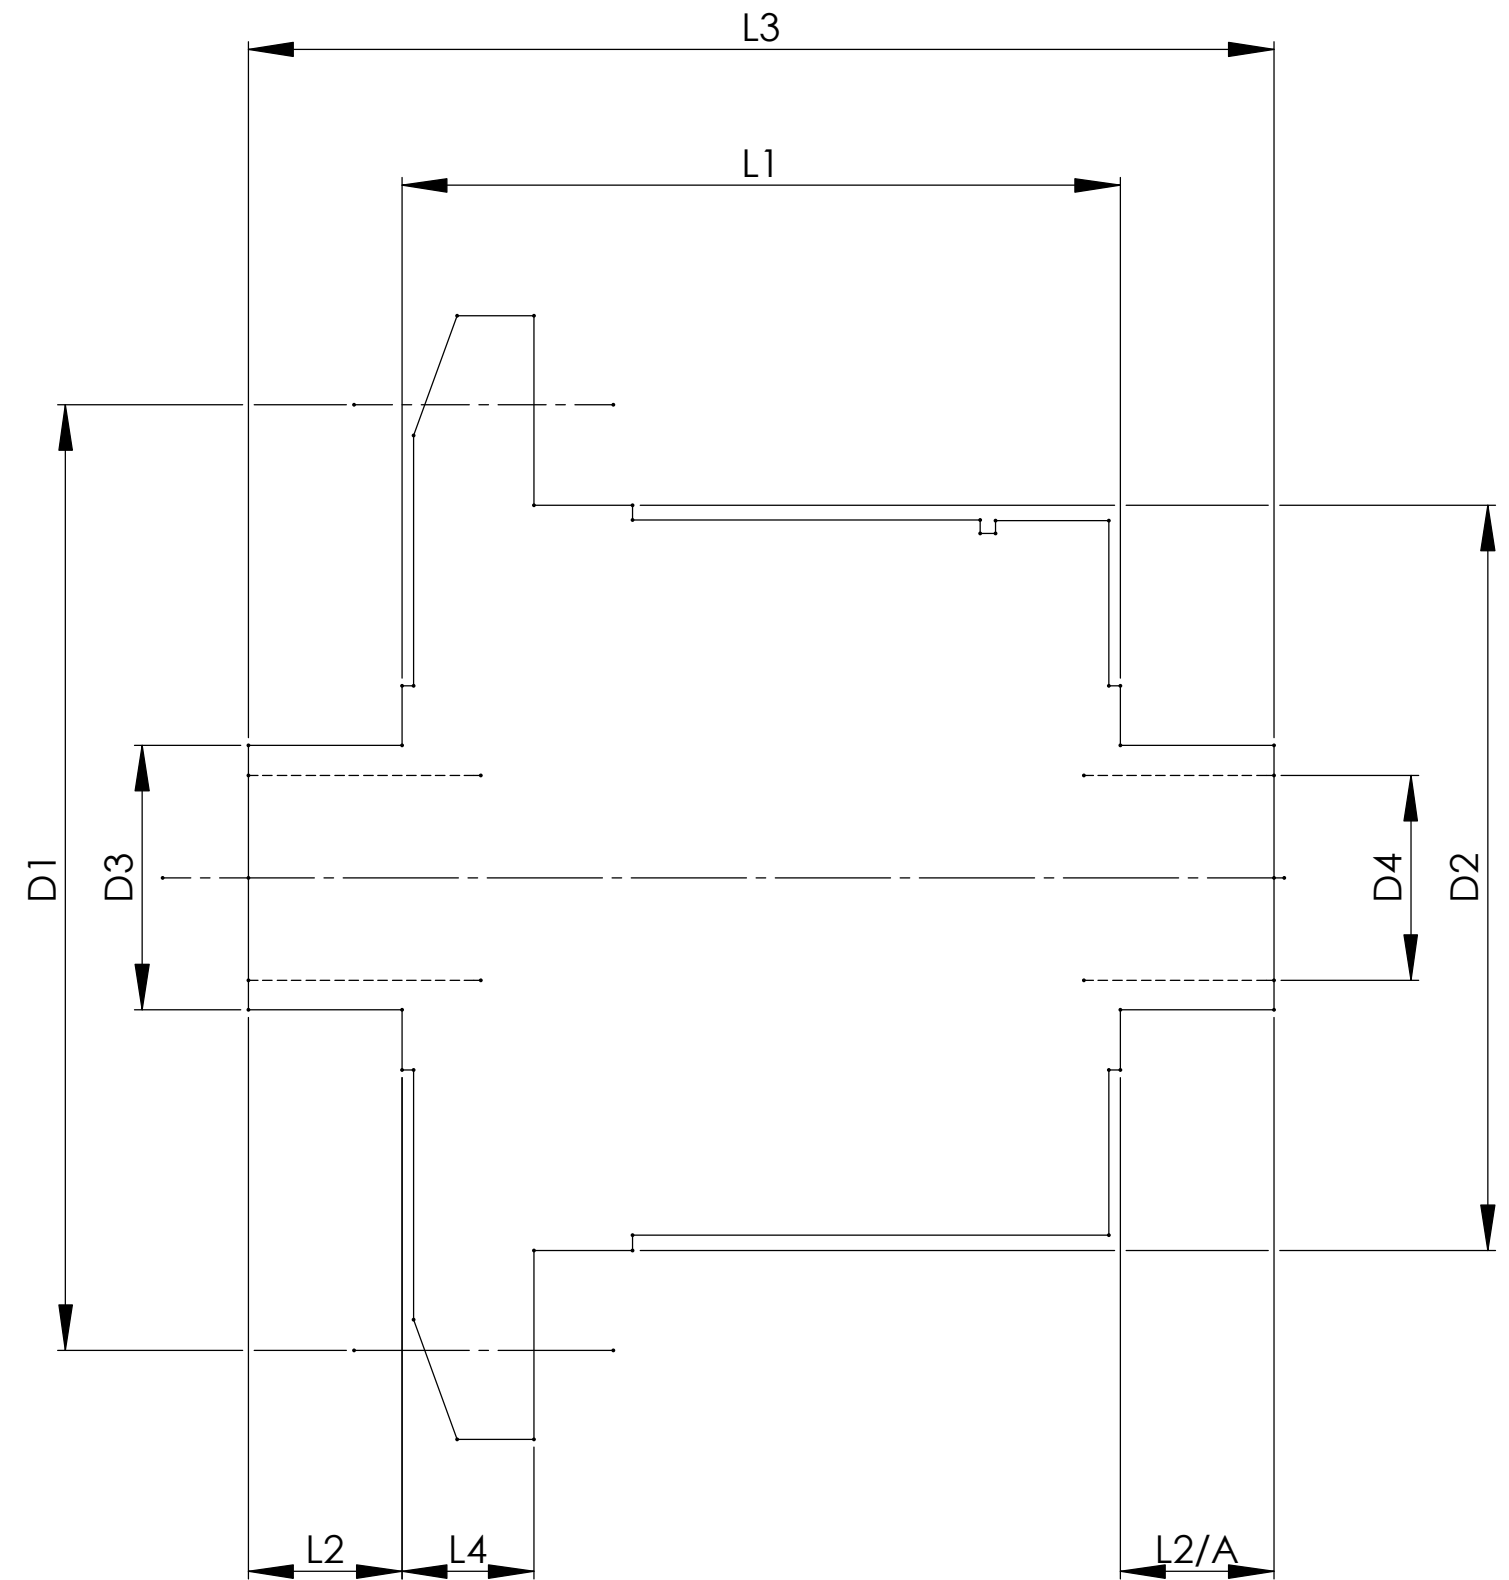

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF28E

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF RT QUAIPE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 14/10/13	
DRAWN BY. A.N.	
Used In. TOYOTA GT86, SUBARU BRZ, SCION FR-S	