


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.562	115.9
No. OF BOLTS		8	8
THREAD / THRO' HOLE		0.394	10.0
CROWN WHEEL SPIGOT DIA	D2	3.6856	93.6
BEARING DIA	D3	1.2516	31.8
BEARING DISTANCE	L1	3.620	92.0
SPIGOT LENGTH	L2	0.800	20.3
	L2/A	0.800	20.3
OVERALL LENGTH	L3	5.220	132.6
BEARING/CROWN WHEEL	L4	0.572	14.5
BORE	D4	0.881	22.4
DRIVE SHAFT SPLINE:-			
No. OF TEETH		20	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

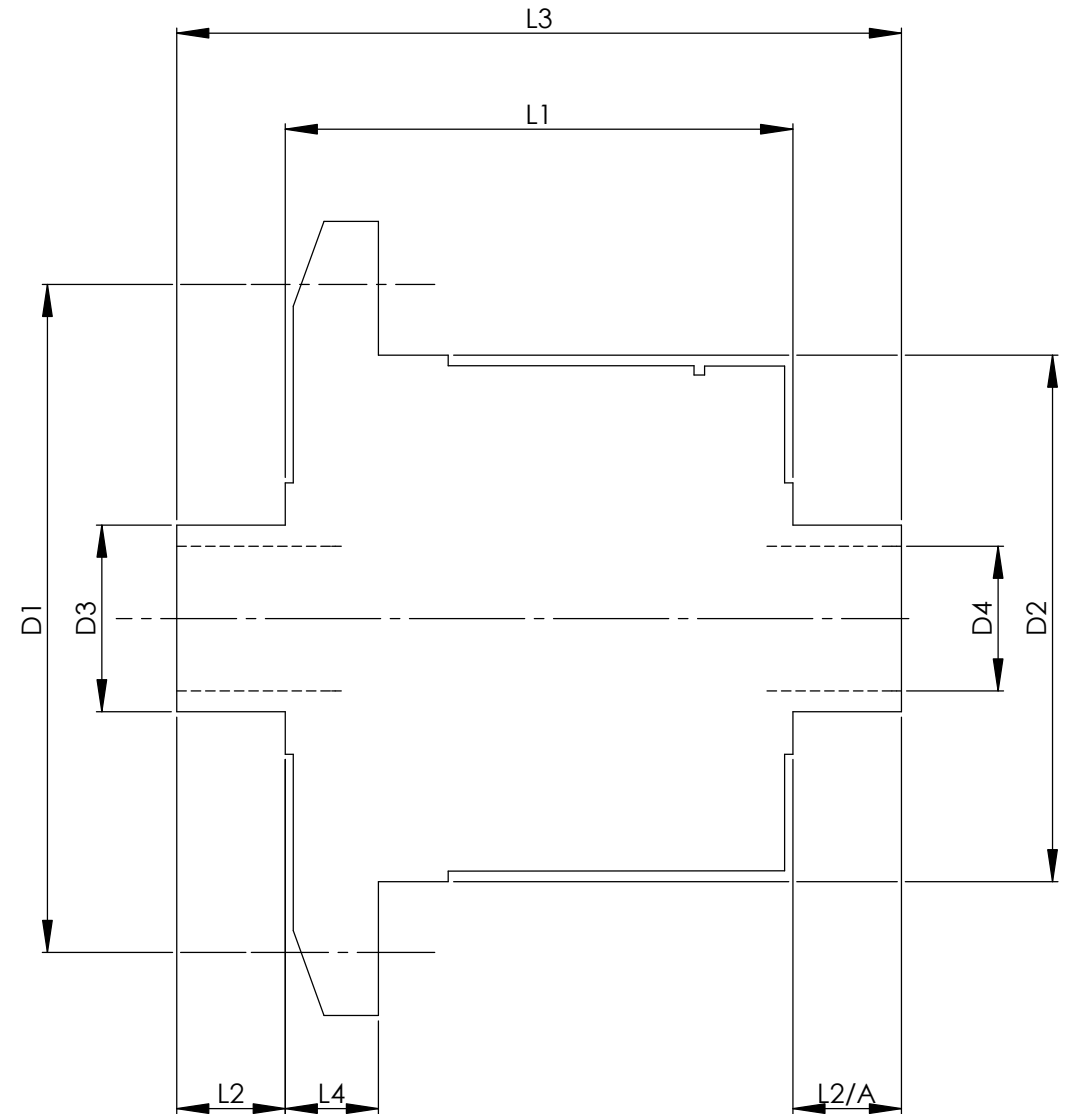

TITLE R.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDF8K

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH. GRIND@G

LIMITS. FRACT. ± 1/64"

DEC. ± 0.005"

MATERIAL.

TREATMENT.

ISSUE. 01 DATE. 17.5.05

DRAWN BY. M.L.M.

Used In. CATERHAM (Ital/Marina)