

Drg No. QDH6D

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.961	126.0
No. OF BOLTS		12	12
THREAD / THRO' HOLE		0.335	8.5
CROWN WHEEL SPIGOT DIA	D2	4.330	109.98
BEARING DIA	D3	1.772	45.01
BEARING DISTANCE	L1	3.706	94.13
SPIGOT LENGTH	L2	0.823	20.9
	L2/A	0.823	20.9
OVERALL LENGTH	L3	5.352	135.94
BEARING/CROWN WHEEL	L4	0.515	13.08

DRIVE SHAFT SPLINE:-

No. OF TEETH

TYPE

6
STRAIGHT SIDED

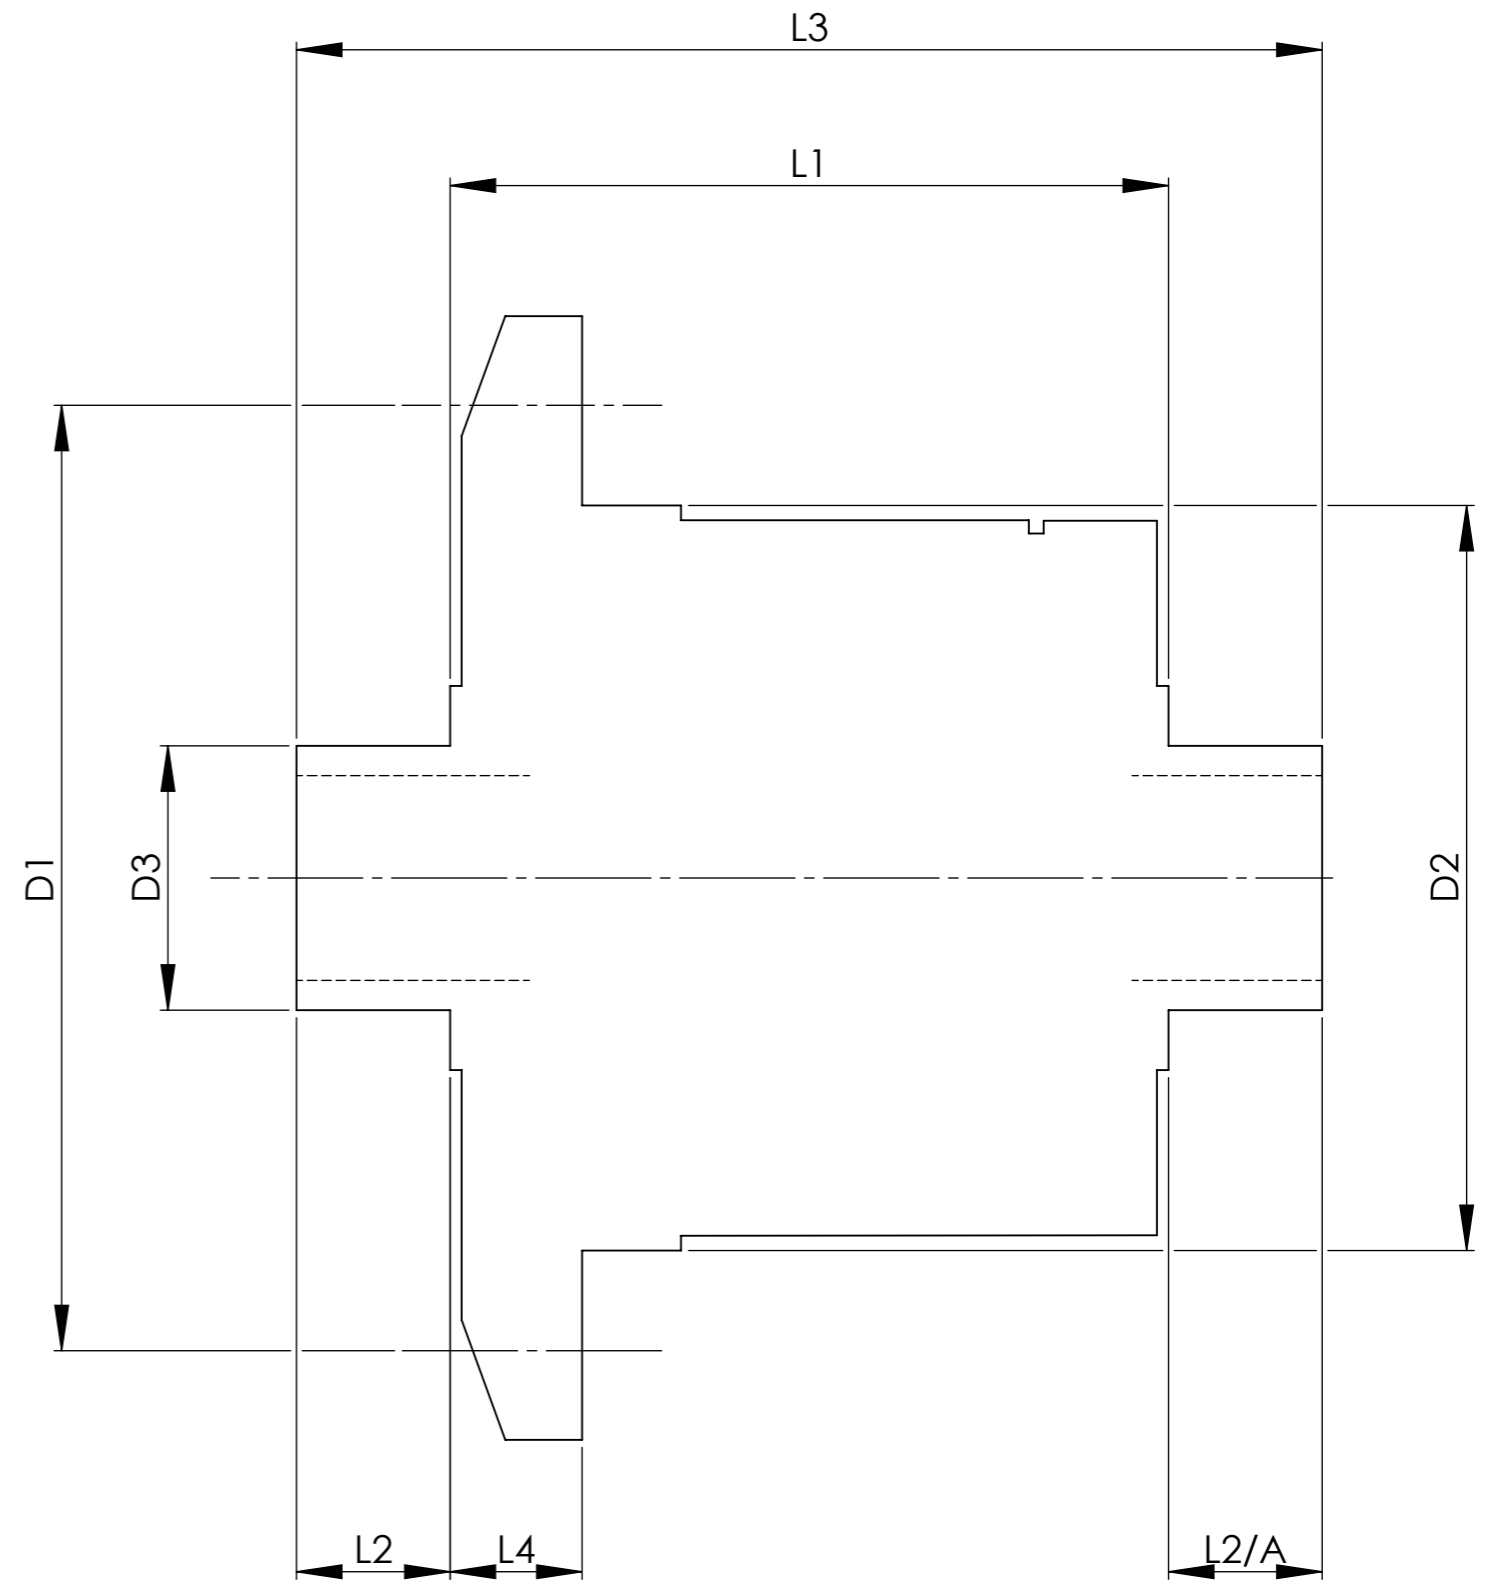

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH6D

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 26.9.12	
DRAWN BY. J.P.D.	
Used In. FERRARI 212 DIFF.	

IF IN DOUBT, ASK.

Quaife Design & Development.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN THE EXCLUSIVE PROPERTY OF R.T. QUAIFFE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.