


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.039	128
No. OF BOLTS		12	12
THREAD / THRO' HOLE		0.492/M12x1.25	12.5/M12x1.25
CROWN WHEEL SPIGOT DIA	D2	4.330	110.0
BEARING DIA	D3	1.970	50.0
BEARING DISTANCE	L1	4.537	115.2
SPIGOT LENGTH	L2	0.947	24.1
	L2/A	0.937	23.8
OVERALL LENGTH	L3	6.421	163.1
BEARING/CROWN WHEEL	L4	1.091	27.7
BORE	D4	1.339	34.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		41	
PITCH		32/64 D.P.	
TYPE		FILLET ROOT SIDE FIT	
PRESSURE ANGLE		45°	

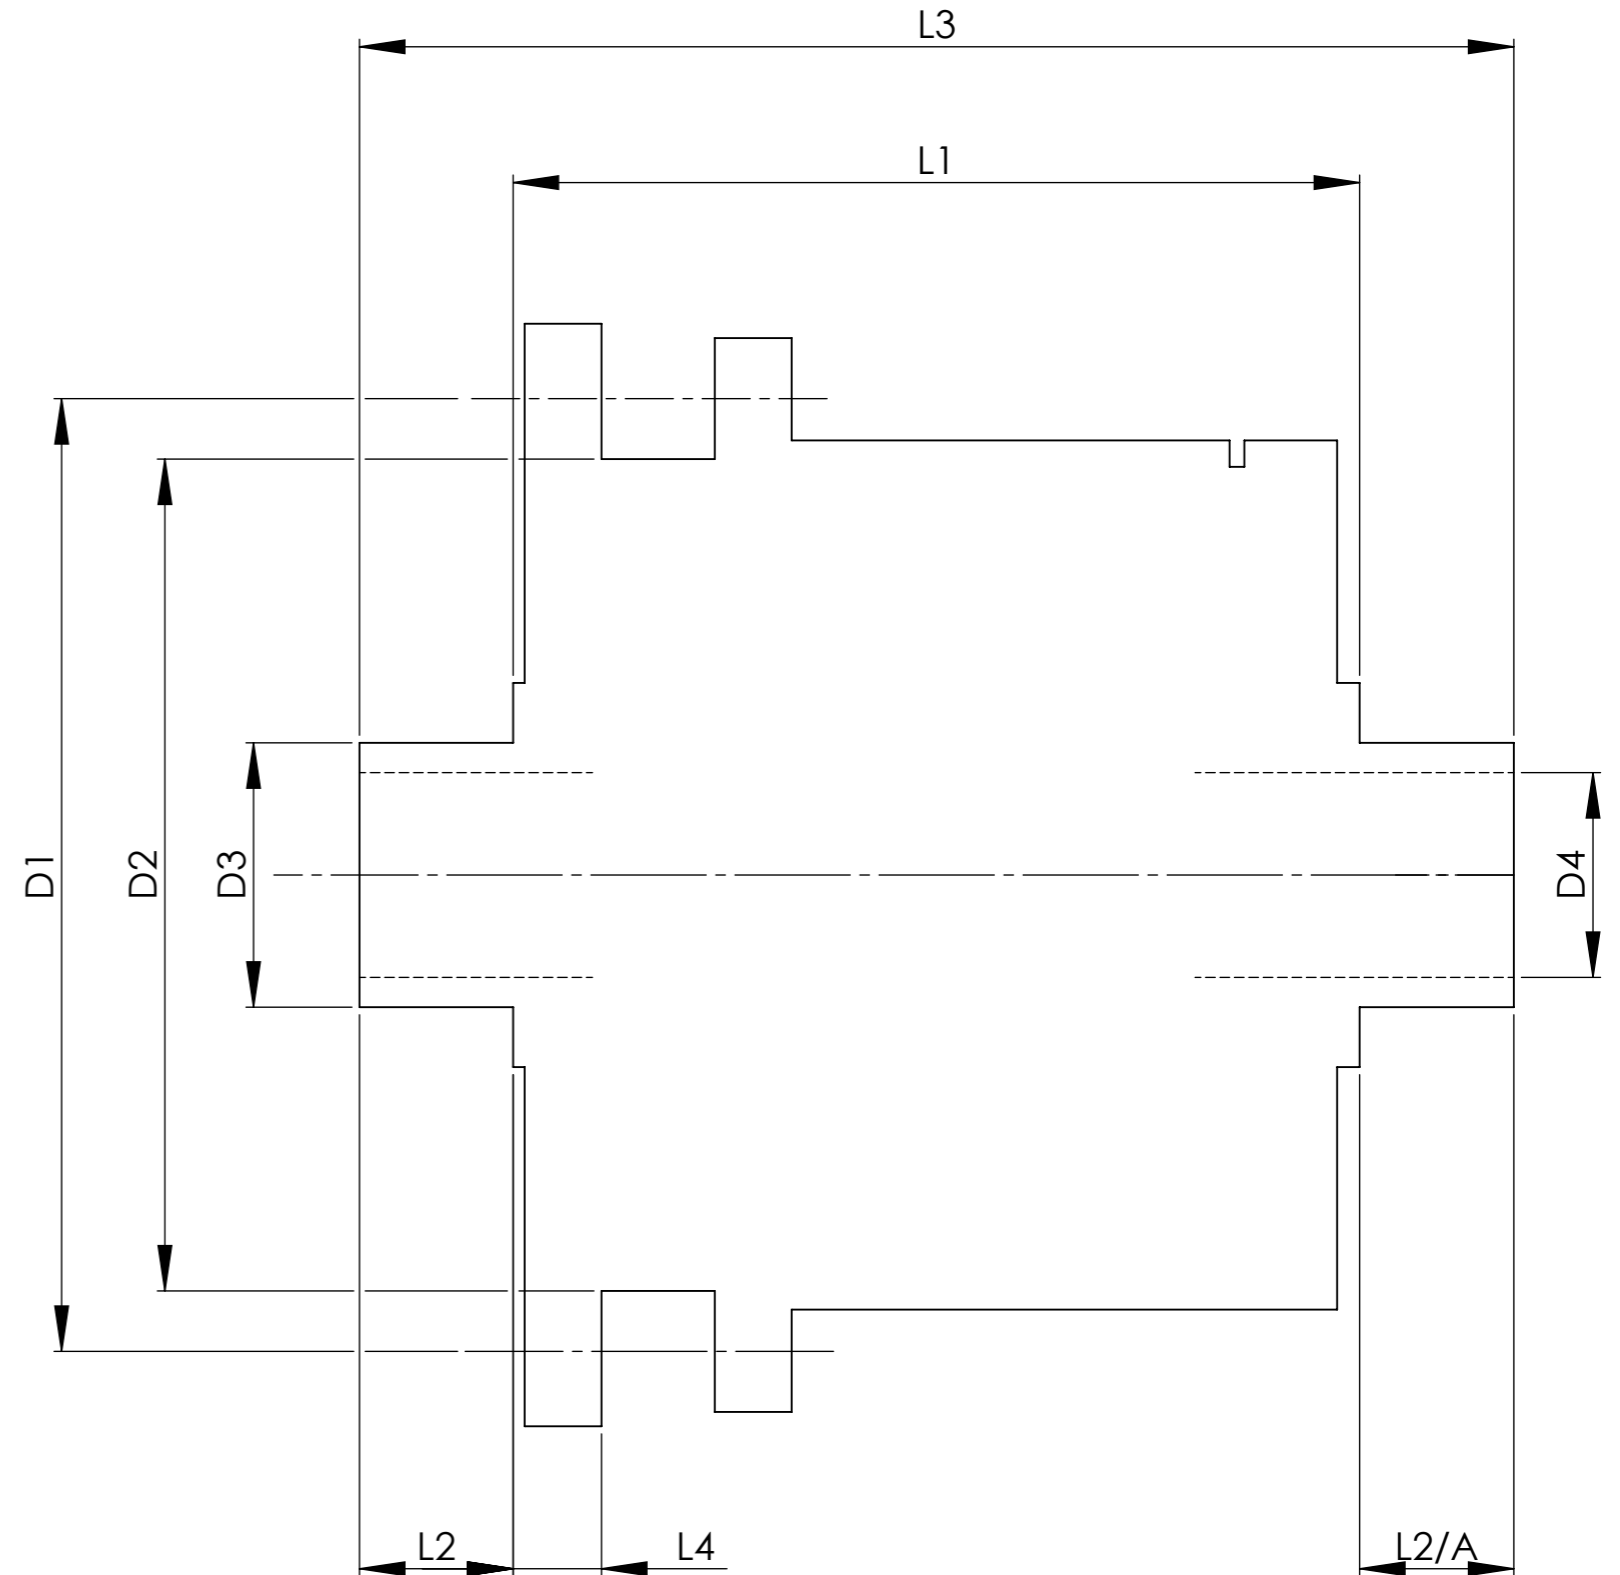

TITLE	DOUBLE FLANGE DIFF DATA SHEET.
SCALE	1:1 U.O.S. SHEET 1 OF 1
Drg. No.	QDH3V

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFFE ENGINEERING LTD. AND MAY NOT BE USED, COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH.	MACH, GRIND@G
LIMITS. FRACT.	± 1/64".
	DEC. ± 0.005".
MATERIAL.	
TREATMENT.	
ISSUE.	01 DATE. 16.7.12
DRAWN BY.	J.P.D.
Used In.	LAMBORGHINI MURCIELAGO REAR DIFF.