


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.197	132
No. OF BOLTS		8	8
THREAD / THRO' HOLE		0.413	10.5
CROWN WHEEL SPIGOT DIA	D2	4.1324	105.0
BEARING DIA	D3	1.5014	38.1
BEARING DISTANCE	L1	4.250	108.0
SPIGOT LENGTH	L2	0.785	19.9
	L2/A	0.785	19.9
OVERALL LENGTH	L3	5.820	147.8
BEARING/CROWN WHEEL	L4	1.180	30.0
BORE	D4	1.098	27.9
DRIVE SHAFT SPLINE:-			
No. OF TEETH		25	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

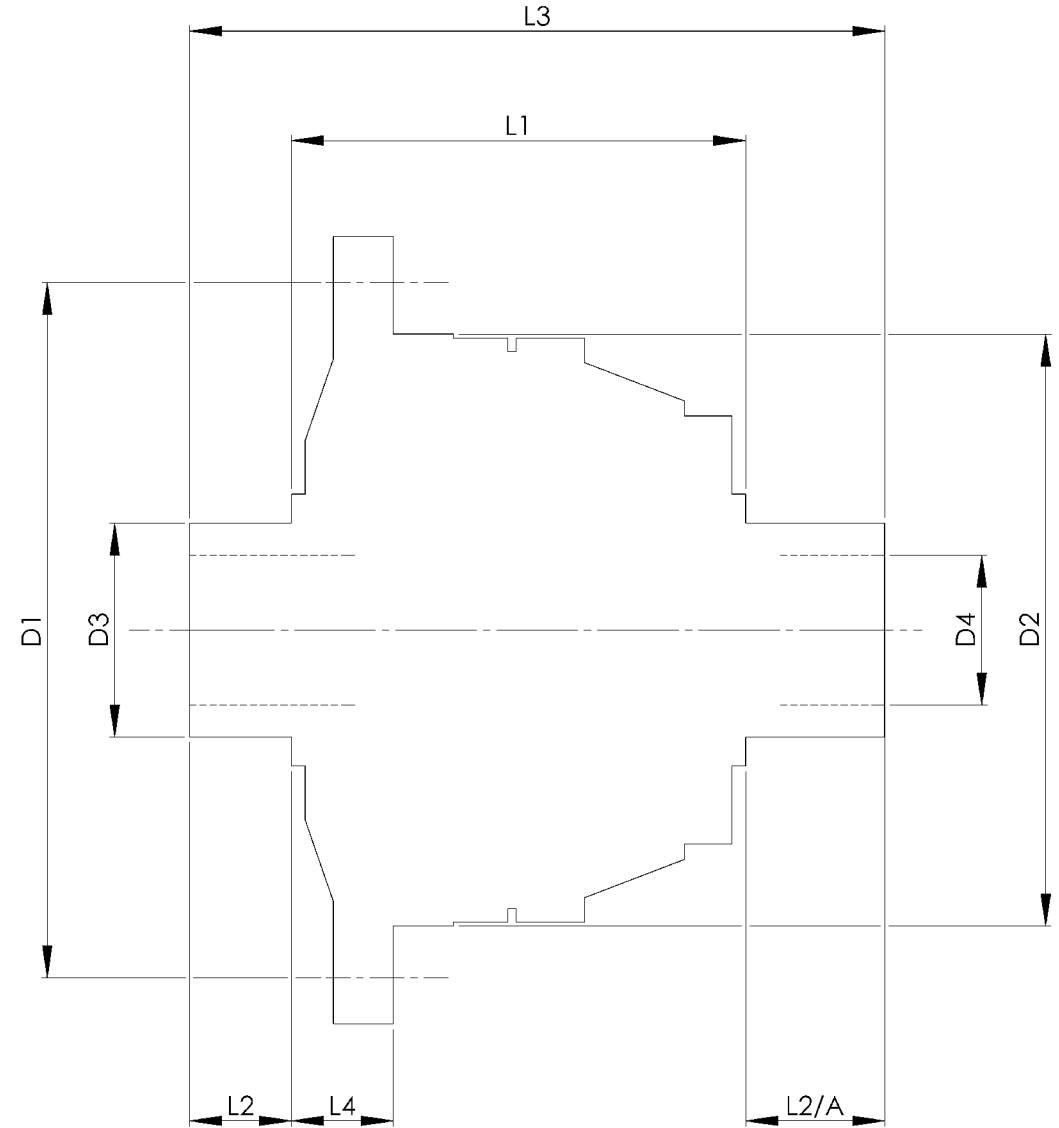

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH5E

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF M.L.M. ENGINEERING LTD. ANY UNAUTHORIZED REPRODUCTION OR USE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 24.5.05	
DRAWN BY. M.L.M.	
Used In. ALFA 1600	