


Drg No. QDH6J

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.040	128
No. OF BOLTS		12	12
THREAD / THRO' HOLE		M10x1.25	M10x1.25
CROWN WHEEL SPIGOT DIA	D2	4.3306	110.0
BEARING DIA	D3	1.9696	50.0
BEARING DISTANCE	L1	3.565	90.6
SPIGOT LENGTH	L2	0.795	20.2
	L2/A	0.770	19.6
OVERALL LENGTH	L3	5.130	130.3
BEARING/CROWN WHEEL	L4	1.165	29.6
BORE	D4	1.183	30.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

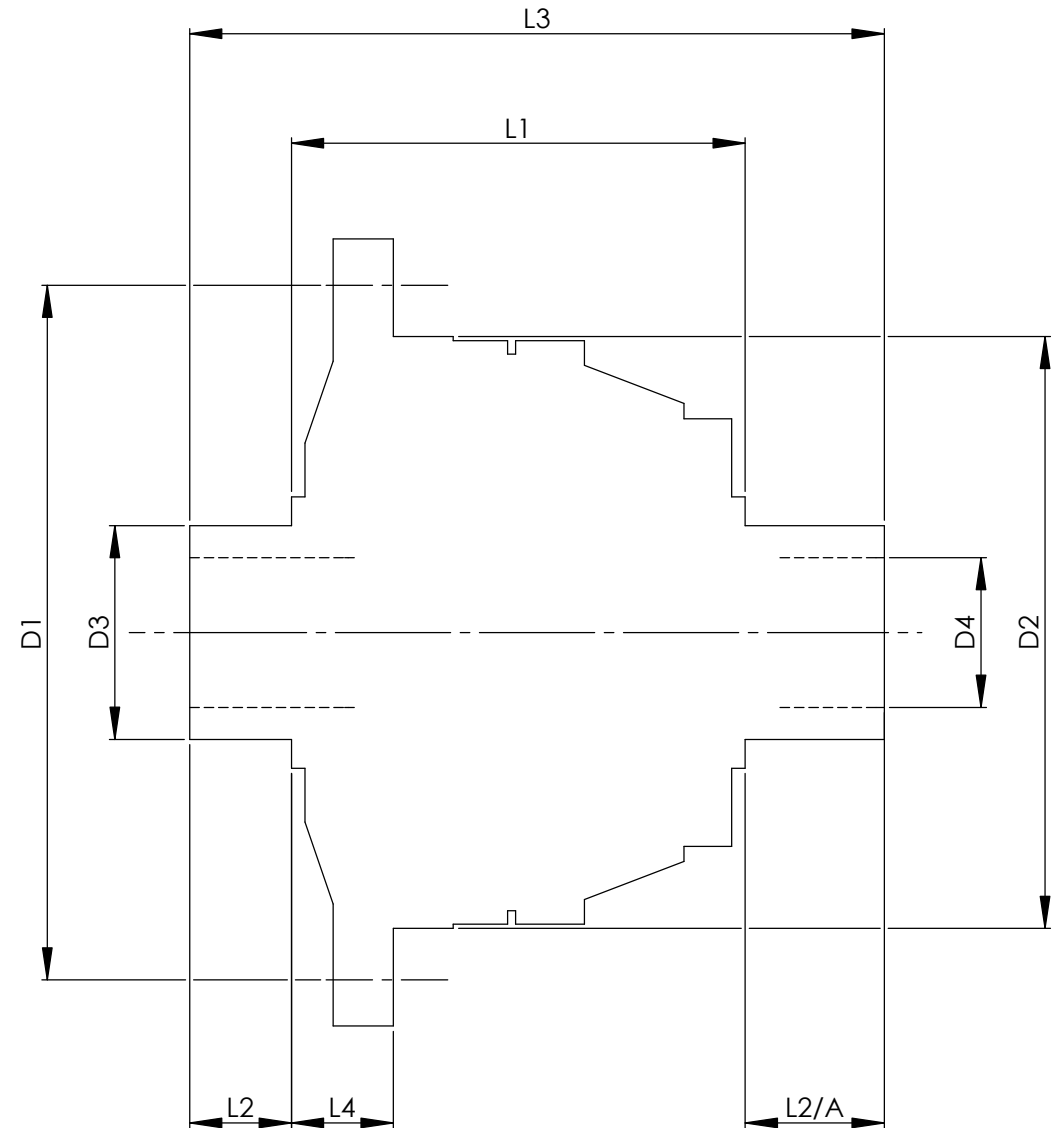

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDH6J

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF RT SQUARE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH, GRIND@G
 LIMITS. FRACT. ± 1/64".
 DEC. ± 0.005".
 MATERIAL.
 TREATMENT.
 ISSUE. 01 DATE. 20.5.05
 DRAWN BY. M.L.M.

Used In. SAAB 9000 96 - 98MY