


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.378	162.0
No. OF BOLTS		16	16
THREAD / THRO' HOLE		0.492	12.5
CROWN WHEEL SPIGOT DIA	D2	4.8816	124.0
BEARING DIA	D3	1.9695	50.0
	D3/A	1.9695	50.0
BEARING DISTANCE	L1	4.272	108.5
SPIGOT LENGTH	L2	0.850	21.6
	L2/A	1.025	26.0
OVERALL LENGTH	L3	6.148	156.2
BEARING/CROWN WHEEL	L4	0.631	16.0
BORE	D4	1.379	35.0

DRIVE SHAFT SPLINE:-

No. OF TEETH	24
PITCH	20/40 DP
TYPE	FLAT ROOT SIDE FIT
PRESSURE ANGLE	30 DEG

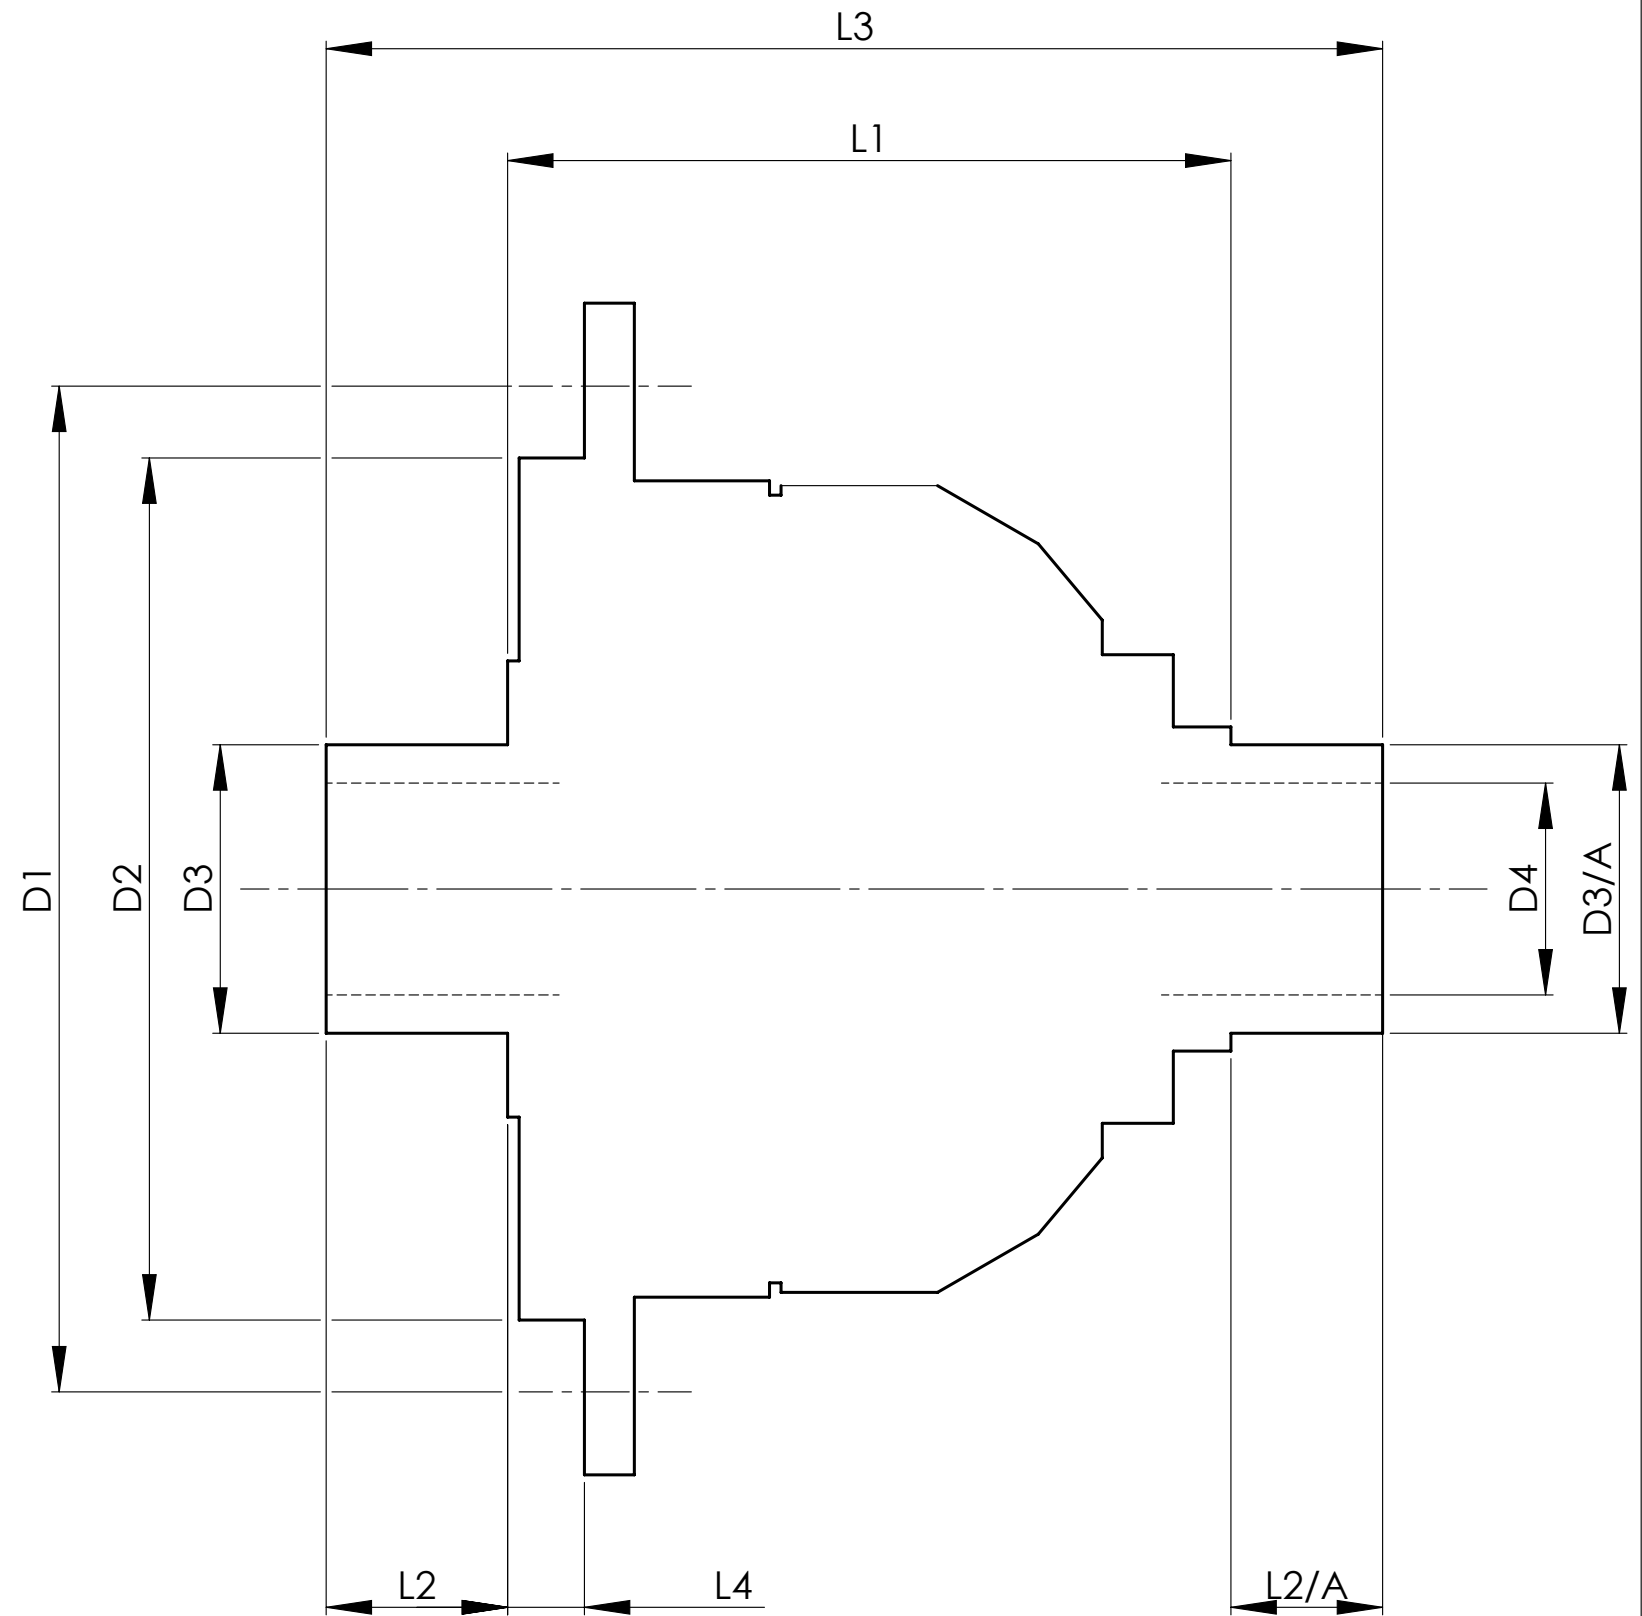

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF27E

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN THE EXCLUSIVE PROPERTY OF RT QUAIPE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. ± 1/64".	
DEC. ± 0.005".	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 2.10.09	
DRAWN BY. J.P.D.	
Used In. TOYOTA RAV4 FWD	
LOTUS EVORA	